

SM Silent Eco Series

Silent Inline fan with energy saving EC motor. This model provides superior extraction with higher pressure characteristics.

IP44
Rated

Low
Noise

EC
Motor

1
Year

1 year
replacement
warranty



150: EXHGHDE150
200: EXHGHDE200

The fan comes with a lead and plug for DIY installation. The EC motor provides excellent performance against pressure as illustrated by the pressure curves.


The all plastic construction includes inner perforations to reduce noise. The unit is wrapped in sound absorbing insulation which is contained within the black plastic housing.




	150	200
Voltage	220 - 240	220 - 240
Current (A)	0.94	1.05
Power (w)	70	165
Noise Level dB(A)	TBC	TBC
Capacity (m3/hr)	602	1250
Capacity (l/s)	167.22	347.22
Capacity (CFM)	354.32	735.32
Duct Size (mm)	150	200

Maximum temperature of transferred air 60°. The fan is designed for indoor application with the ambient temperature ranging from +1 °C up to +40 °C and relative humidity up to 80 %.

150 Model
EXHGHDE150

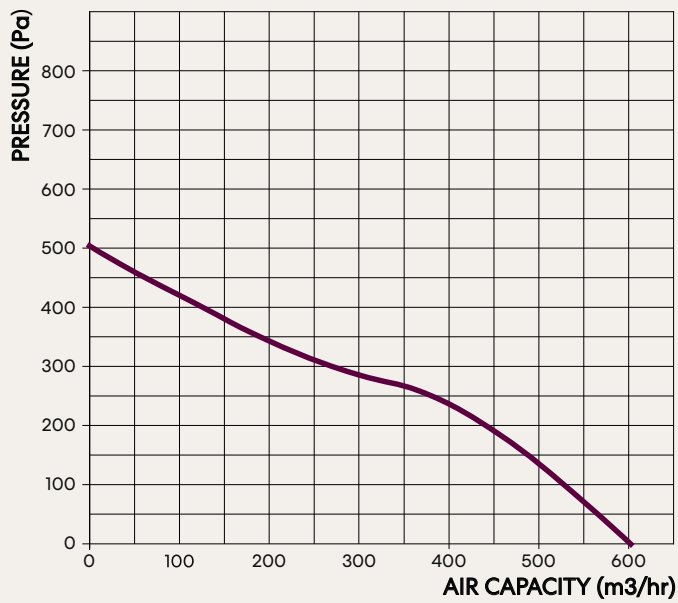

200 Model
EXHGHDE200

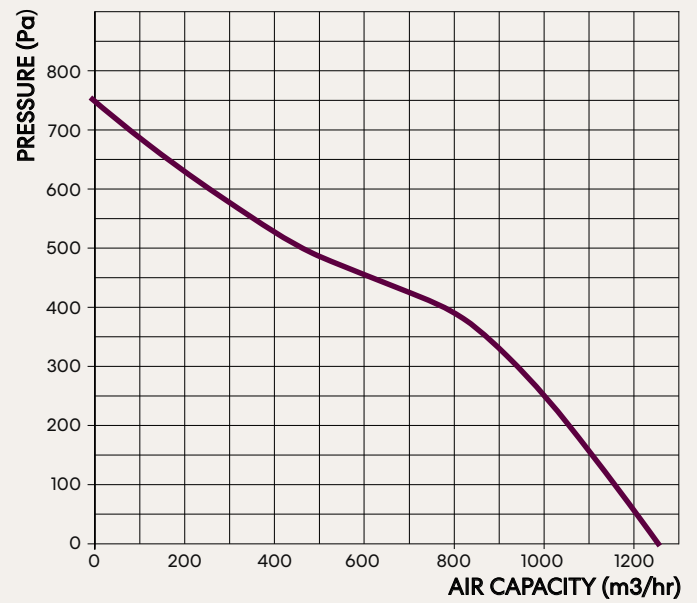

Central motor can easily be removed from the mounting bracket, which also has the inlet & outlet flanges built in.



Dimensions (mm)

Model	D	B	L	H
150	149	221	488	244
200	198	262	567	301

