
Infinity-iD

Scandinavian style designed combining energy efficiency, durability & functionality.

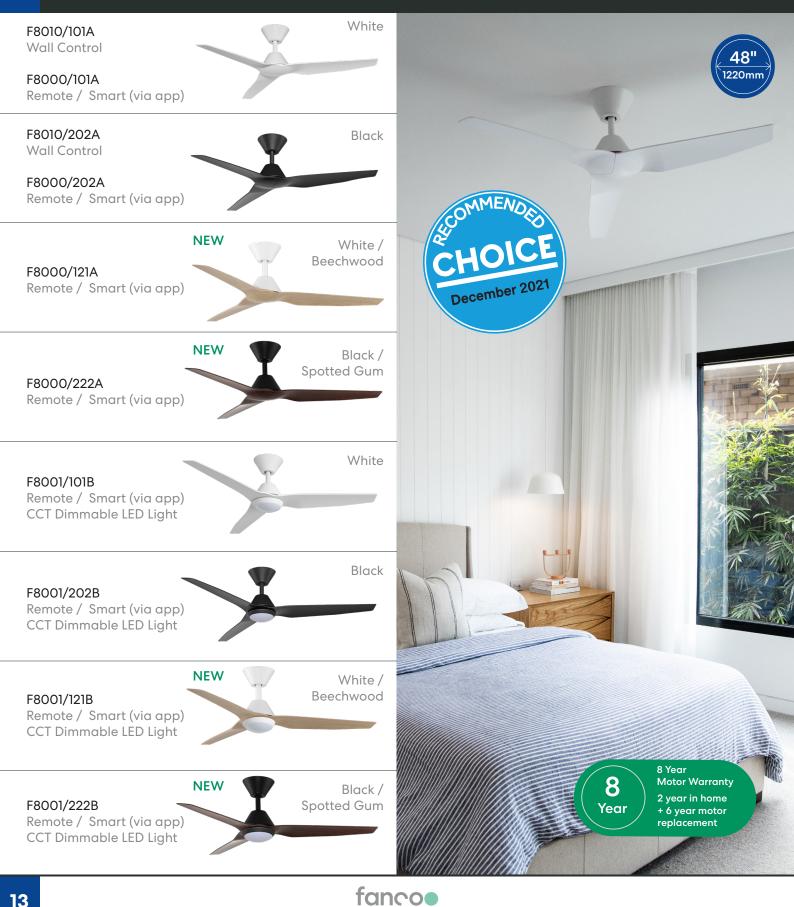

Technical Data

| Install Location: | Indoor / Outdoor* & Coastal |
|-------------------|-----------------------------|
| Motor Type: | DC |
| Blade Material: | ABS Plastic |
| Operation: | Wall Control SMART/Remote |
| | Remote frequency 2.4 GHz |

| Reversible SMART/Remote: | Yes |
|--------------------------|----------|
| Reversible Wall Control: | No |
| Ceiling Mount Angle: | 0-7° |
| Blade Pitch: | 12° |
| Timer: | 1-9 Hour |

LED (18w)

Yes (8 Steps)

About the CCT LED Light

| • | • | • |
|-------------|-------------|-------------|
| 3000k | 4200k | 5000k |
| 1300 Lumens | 1600 Lumens | 1500 Lumens |

| SP13-MK001 - User Replaceable LED Light |
|--|
| Panel. Plug in LED panel can be replaced |
| without an electrician. |



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Light Type:


Dimmable:

| Performance - Remote / SMART | | | | | |
|------------------------------|---------------|-----|---------|--|--|
| Speed | Motor Wattage | RPM | Airflow | | |
| 1 | 3.2 | 60 | 3,240 | | |
| 2 | 4.2 | 94 | 4,553 | | |
| 3 | 6.1 | 129 | 5,861 | | |
| 4 | 9.1 | 163 | 7,056 | | |
| 5 | 13.5 | 197 | 8,129 | | |
| 6 | 20.2 | 230 | 9,409 | | |

| Perfor | rmance - Wall C | Control | Ó |
|--------|-----------------|---------|---------|
| Speed | Motor Wattage | RPM | Airflow |
| 1 | 4.3 | 90 | 4,453 |
| 2 | 5.7 | 118 | 5,646 |
| 3 | 7.6 | 146 | 6,259 |
| 4 | 10.6 | 175 | 7,542 |
| 5 | 15 | 203 | 8,367 |
| 6 | 21.3 | 230 | 9,411 |

Airflow measured in m3/hr

Dimensions

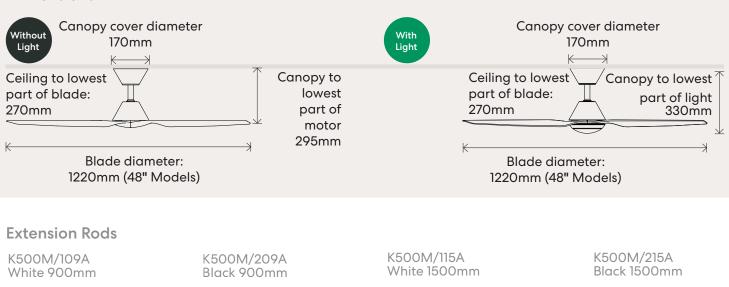

Infinity-iD DC 54^m

Scandinavian style designed combining energy efficiency, durability & functionality.



Technical Data

| Install Location: | Indoor / Outdoor* & Coastal |
|-------------------|-----------------------------|
| Motor Type: | DC |
| Blade Material: | ABS Plastic |
| Operation: | Wall Control SMART/Remote |
| | Remote frequency 2.4 GHz |

| al | Reversible SMART/Remote: | Yes |
|-----|--------------------------|----------|
| | Reversible Wall Control: | No |
| | Ceiling Mount Angle: | 0-7° |
| ote | Blade Pitch: | 12° |
| | Timer: | 1-9 Hour |
| | | |

LED (18w)

Yes (8 Steps)

About the CCT LED Light

| • | • | • |
|-------------|-------------|-------------|
| 3000k | 4200k | 5000k |
| 1300 Lumens | 1600 Lumens | 1500 Lumens |

| SP13-MK001 - User Replaceable LED Light |
|--|
| Panel. Plug in LED panel can be replaced |
| without an electrician. |



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained


Light Type: Dimmable:

| Performance - Remote / SMART | | | | | |
|------------------------------|---------------|-----|---------|--|--|
| Speed | Motor Wattage | RPM | Airflow | | |
| 1 | 3.4 | 60 | 3,420 | | |
| 2 | 4.6 | 88 | 4,644 | | |
| 3 | 6.8 | 116 | 6,049 | | |
| 4 | 10 | 145 | 7,02 | | |
| 5 | 15.2 | 174 | 8,641 | | |
| 6 | 22.5 | 200 | 10,801 | | |

| Perfor | rmance - Wall C | Control | Ó |
|--------|-----------------|---------|---------|
| Speed | Motor Wattage | RPM | Airflow |
| 1 | 5 | 90 | 4,631 |
| 2 | 6.4 | 112 | 5,934 |
| 3 | 8.7 | 135 | 6,796 |
| 4 | 12 | 157 | 7,298 |
| 5 | 16.4 | 179 | 8,743 |
| 6 | 23 | 200 | 10,859 |

Airflow measured in m3/hr



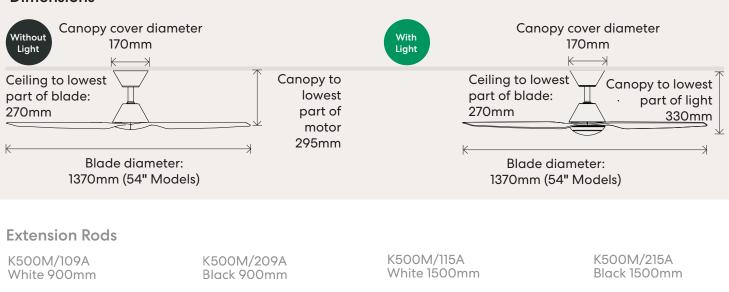

The Architecturally inspired favourite now available in a larger, 64 inch diameter option for Summer 2023/24.



Infinity-iD

DC 64^{III}



Technical Data

| Install Location: | Indoor / Outdoor* & Coastal | | |
|-------------------|--|--|--|
| Motor Type: | DC | | |
| Blade Material: | ABS Plastic Wall Control SMART/Remote | | |
| Operation: | | | |
| | Remote frequency 2.4 GHz | | |

| Motor Type: | DC | | Reversible Wall Control: | No | |
|-------------------------|--|----------------------|--|---------------|--|
| Blade Material: | ABS Plastic Wall Control SMART/Remote | | Ceiling Mount Angle: | 0-7° | |
| Operation: | | | Blade Pitch: | 12° | |
| | Remote frequ | ency 2.4 GHz | Timer: | 1-9 Hour | |
| About the CCT LED Light | | Light Type: | LED (18w) | | |
| • | • | • | Dimmable: | Yes (8 Steps) | |
| 3000k 1300 Lumens | 4200k 1600 Lumens | 5000k 1500 Lumens | SP13-MK005 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician. | | |

Reversible SMART/Remote: Yes

LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained


Performance

| Speed | Motor Wattage | RPM | Airflow |
|-------|---------------|-----|---------|
| 1 | 4.6 | 60 | 6,983 |
| 2 | 6.4 | 85 | 8,136 |
| 3 | 9.6 | 109 | 9,045 |
| 4 | 14.1 | 133 | 10,795 |
| 5 | 22.3 | 156 | 11,589 |
| 6 | 32.3 | 180 | 13,658 |

NEW - Tandem Remote / Smart & Wall Control Packages

These packages include a remote control, SMART functionality as well as a wired DC wall control. The remote and wall control can work in tandem providing you with the convenience associated with remote as well as the reliability of a fixed wall control.

Airflow measured in m3/hr

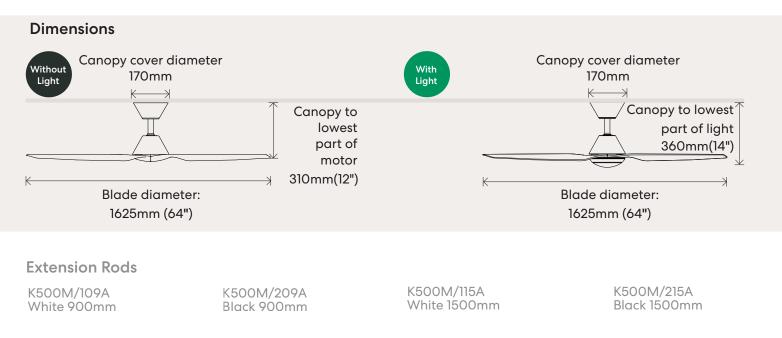

tuya