fanco

Ceiling Fan Collection 2024

Collection Index



Model	Page No	Motor	Blade	Location	Control
Breeze	3 - 4	AC	ABS Plastic	Indoor Outdoor* Coastal	Wall Control
Eco Style	5 - 8	DC	ABS Plastic	Indoor Outdoor*	Remote Control
Eco Silent	9 - 10	DC	Plywood	Indoor	Remote / Wall Control
Eco Silent Deluxe	11 - 12 —	DC	ABS Plastic	Indoor Outdoor* Coastal	Remote / SMART (VIA APP) Wall Control
Infinity-iD	13 - 18	DC	ABS Plastic	Indoor Outdoor* Coastal	Remote / SMART (VIA APP) Wall Control
Studio	19 - 20	DC	ABS Plastic	Indoor	Remote / SMART (VIA APP) Wall Control
Horizon	21 - 22	DC	ABS Plastic	Indoor Outdoor* Coastal	Remote / SMART (VIA APP) Wall Control
Origin	23 - 24	DC	ABS Plastic	Indoor Outdoor*	Remote Control
Wynd	25 - 26 -	DC	Solid Timber	Indoor	Remote Control
Sanctuary	27 - 30	DC	Solid Timber	Indoor Outdoor* Coastal	Remote Control
Sanctuary XL	31 -32	DC	Solid Timber	Indoor Outdoor* Coastal	Remote Control
Urban-iD	33 - 34 -	DC	Plywood	Indoor	Remote Control

^{*}All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Size Options	Light Option	Warranty	Colour Options
52" 1320mm	18W CCT LED Not Dimmable	2 year in home + 6 year motor replacement*	
52" 60" 1520mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
48" (52") 1220mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
52" (56") 1320mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
48" (54" (64" (1625mm) (1625mm)	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
42" 1066mm 48" 1220mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
(52") (64") (1625mm)	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
56" 1420mm	18W CCT LED Not Dimmable	2 year in home + 6 year motor replacement*	
54" 1370mm	No Light	2 year in home + 6 year motor replacement*	
(52") (70") (1778mm)	24W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
86" 2184mm 2340mm	24W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
52" 1320mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	

^{*6} year motor replacement upon product registration - register product online within 90 days of purchase.

Breeze



Flowing design that produces a calming breeze. The perfect complement to a modern living space.



F0100/101A

White No Light



Black No Light



F0100/205A

Black / Koa No Light



White / Beechwood No Light



F0101/101A

White LED Light



F0101/202A

Black LED Light



F0101/205A

Black / Koa LED Light



F0101/121A

White / Beechwood LED Light



Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	AC
Blade Material:	ABS Plastic
Operation:	Wall Control

Reversible:	Yes (via motor)
Ceiling Mount Angle:	0-15°
Blade Pitch:	12° (Approx)

About the CCT LED Light

•	•	•
3000k	4000k	6000k
1408 Lumens	1501 Lumens	1474 Lumens

Light Type: LED (18w)


Dimmable: No

Performance

Speed	Motor Wattage	RPM	Airflow
1	18w	107	4,707 m3/hr
2	34w	153	7,132 m3/hr
3	55w	197	9,732 m3/hr

Anti-corrosive paint applied on all metal components & ABS blades make this fan suitable for coastal environment installation

Dimensions

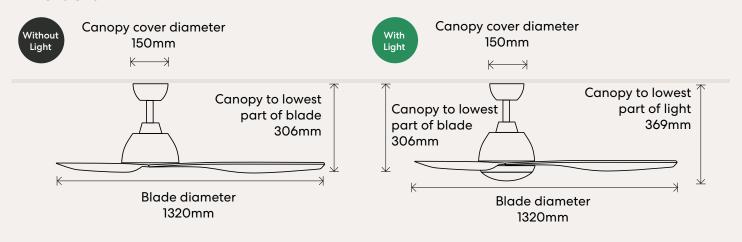

Extension Rods

K505M/109A K505M/118A White 900mm White 1800mm

K505M/209A K505M/218A Black 900mm Black 1800mm

Eco Style

DC 52"

A contemporary three blade design to complement modern decor inside and outside the home.



Key Details

Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Remote Control

Remote frequency 433 MHz

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	0-15°
Blade Pitch:	15° (Approx)

About the CCT LED Light

1408 Lumens

1501 Lumens

5700k 1474 Lumens Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




Performance - No Light Models


Speed	Motor Wattage	RPM	Airflow
1	4.2w	74	5,050 m3/hr
2	6.6w	106	6,589 m3/hr
3	9.7w	129	7,846 m3/hr
4	14.8w	153	8,326 m3/hr
5	20.3w	171	9,035 m3/hr
6	35w	208	10,486 m3/hr

Performance - LED Light Models

Speed	Motor Wattage	RPM	Airflow
1	6.8w	90	6,150 m3/hr
2	10.4w	123	7,680 m3/hr
3	15w	142	8,063 m3/hr
4	21w	161	8,540 m3/hr
5	27w	175	9,580 m3/hr
6	36w	195	10,395 m3/hr

Dimensions

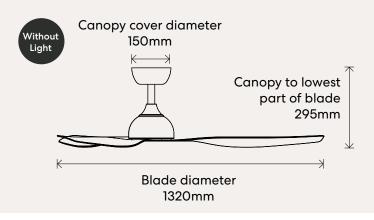

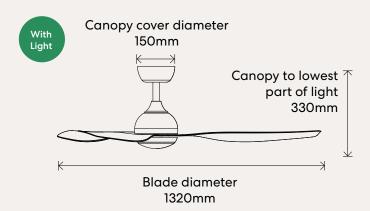

Extension Rods - No Light Models

K505M/109A K505M/118A White 900mm White 1800mm

K505M/209A K505M/218A Black 900mm Black 1800mm


Extension Rods - LED Light Models

K5061/109A K5061/118A White 900mm White 1800mm

K5061/209A K5061/218A Black 900mm Black 1800mm

Eco Style DC 60 DC 60

A contemporary large diameter three blade design well suited to larger living spaces.

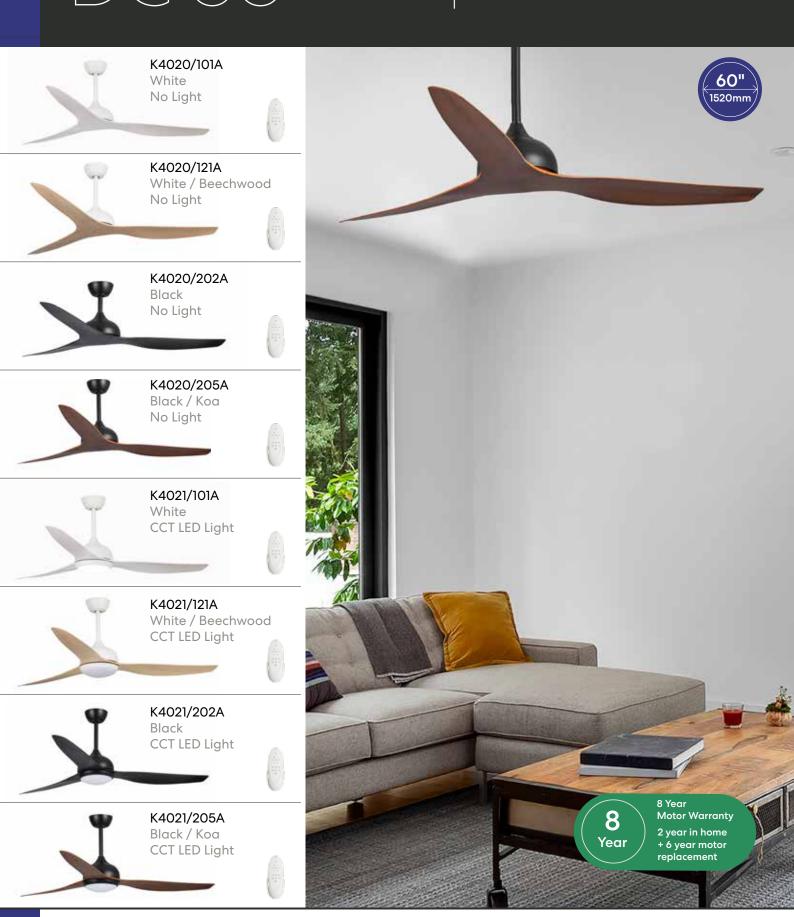

Key Details

Install Location:	Indoor / Outdoor*	
Motor Type:	DC	
Blade Material:	ABS Plastic	

Operation: Remote Control

Remote frequency 433 MHz

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	0-15°
Blade Pitch:	15° (Approx)

About the CCT LED Light

•	•	•
3000k	4000k	6000k
1435 Lumens	1474 Lumens	1461 Lumens

Light Type: LED (24w)

Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




Performance


Speed	Motor Wattage	RPM	Airflow
1	5.6w	80	6,880 m3/hr
2	8.3w	96	8,050 m3/hr
3	llw	113	9,290 m3/hr
4	17w	136	10,500 m3/hr
5	27w	164	13,500 m3/hr
6	40w	191	15,200 m3/hr



Dimensions

Black 900mm

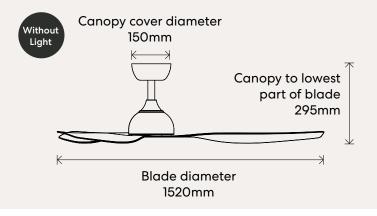

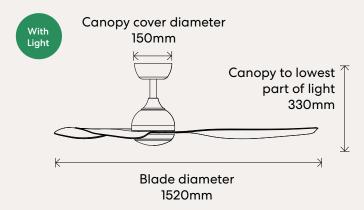

Extension Rods - No Light Models

K505M/109A K505M/118A White 900mm White 1800mm K505M/209A K505M/218A

Black 1800mm

Extension Rods - LED Light Models

K5061/109A K5061/118A White 900mm White 1800mm

K5061/209A K5061/218A Black 900mm Black 1800mm

Eco Silent

Modern design combining performance with quality.



Install Location:	Indoor
Motor Type:	DC
Blade Material:	Timber
Operation:	Wall Control Remote
	Remote frequency 2.4 GHz

Reversible Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-15°
Blade Pitch:	13° (Approx)
Timer:	1-9 Hour

About the CCT LED Light

•	•	•
3000k	4200k	5000k
1300 Lumens	1600 Lumens	1500 Lumens

Light Type: LED (18w)

Dimmable: Yes (8 Steps)


SP13-MK002 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

48" Remote			52" Remote				
Speed	Wattage	RPM	Airflow	Speed	Wattage	RPM	Airflow
1	3.6w	60	3,061 m3/hr	1	5w	60	3,911 m3/hr
2	4.5w	90	4,253 m3/hr	2	7w	90	5,242 m3/hr
3	6.7w	125	5,608 m3/hr	3	10w	122	6,394 m3/hr
4	9.4w	161	6,997 m3/hr	4	16w	151	7,454 m3/hr
5	14.1w	183	8,079 m3/hr	5	25w	185	9,202 m3/hr
6	19.4w	215	9,601 m3/hr	6	35w	215	11,060 m3/hr
48" Wall Control							
48" Wal	II Control			52" Wal	II Control		
48" Wa l	II Control Wattage	RPM	Airflow	52" Wa l	I l Control Wattage	RPM	Airflow
		RPM 90	Airflow 4,295 m3/hr			RPM 90	Airflow 5,256 m3/hr
Speed	Wattage				Wattage		
Speed 1	Wattage 4.7w	90	4,295 m3/hr	Speed 1	Wattage 7w	90	5,256 m3/hr
Speed 1 2	Wattage 4.7w 5.8w	90 116	4,295 m3/hr 4,986 m3/hr	Speed 1 2	Wattage 7w 9.5w	90 115	5,256 m3/hr 6,156 m3/hr
Speed 1 2 3	Wattage 4.7w 5.8w 8.4w	90 116 143	4,295 m3/hr 4,986 m3/hr 6,352 m3/hr	Speed 1 2 3	Wattage 7w 9.5w 13.5w	90 115 140	5,256 m3/hr 6,156 m3/hr 7,038 m3/hr

Dimensions

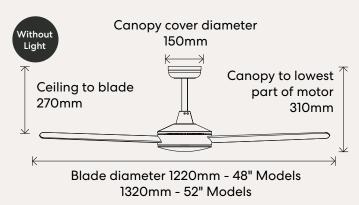



Extension Rods

K500M/109A White 900mm K500M/215A White 1500mm

Eco Silent Deluxe DC

The Eco Silent Deluxe packages all of the year's innovations in a straightforward four blade design.



Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Wall Control SMART/Remote
	Remote frequency 2.4 GHz

Reversible Remote / Smart:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-15°
Blade Pitch:	13° (Approx)
Timer:	1-9 Hour

About the CCT LED Light

 Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-MK002 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

52" SMART / Remote


56" SMART / Remote

Speed	Wattage	RPM	Airflow	Speed	Wattage	RPM	Airflow
1	5w	60	3,911 m3/hr	1	5w	60	5,631 m3/hr
2	7w	90	5,242 m3/hr	2	7w	88	6,953 m3/hr
3	10w	122	6,394 m3/hr	3	10w	116	8,824 m3/hr
4	16w	151	7,454 m3/hr	4	15w	145	10,630 m3/hr
5	25w	185	9,202 m3/hr	5	24w	174	13,874 m3/hr
6	35w	215	11,060 m3/hr	6	35w	200	15,639 m3/hr

52"	Wall Control	56" Wall Control
JZ	Wall Collinol	30 Wall Collino

Speed	Wattage	RPM	Airflow	Speed	Wattage	RPM	Airflow
1	7w	90	5,256 m3/hr	1	7.2w	90	7,069 m3/hr
2	9.5w	115	6,156 m3/hr	2	9.8w	112	8,648 m3/hr
3	13.5w	140	7,038 m3/hr	3	13.7w	136	9,563 m3/hr
4	20.6w	165	8,473 m3/hr	4	18.5w	156	11,956 m3/hr
5	26.2w	190	9,474 m3/hr	5	25.8w	178	14,021 m3/hr
6	35w	215	11,060 m3/hr	6	35w	200	15,639 m3/hr

Dimensions

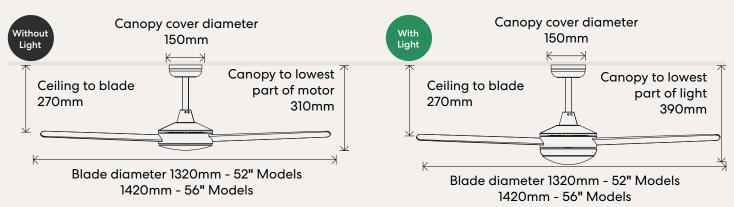


Extension Rods

K500M/109A K500M/209A K500M/115A K500M/215A White 900mm Black 900mm White 1500mm Black 1500mm

Infinity-iD DC 48 DC 48

Scandinavian style designed combining energy efficiency, durability & functionality.

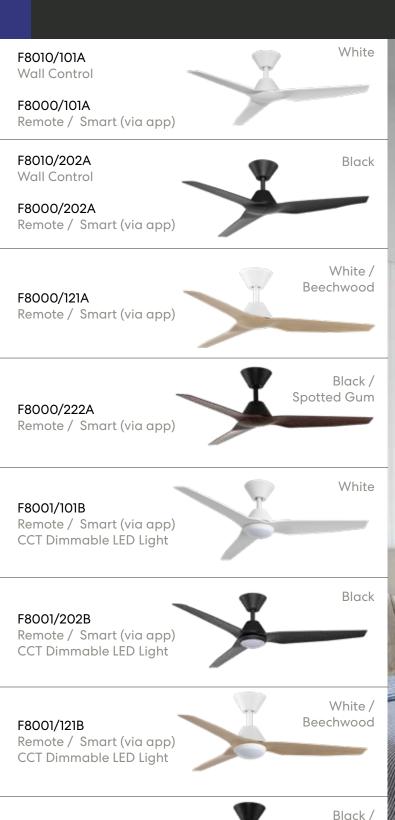



Spotted Gum

F8001/222B

Remote / Smart (via app) CCT Dimmable LED Light

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Wall Control SMART/Remote
	Remote frequency 2.4 GHz

Reversible SMART/Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-7°
Blade Pitch:	12°
Timer:	1-9 Hour

About the CCT LED Light

Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-MK001 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Performance - Remote / SMART

Speed	Motor Wattage	RPM	Airflow
1	3.2	60	3,240
2	4.2	94	4,553
3	6.1	129	5,861
4	9.1	163	7,056
5	13.5	197	8,129
6	20.2	230	9,409

Airflow measured in m3/hr

Performance - Wall Control



Speed	Motor Wattage	RPM	Airflow
1	4.3	90	4,453
2	5.7	118	5,646
3	7.6	146	6,259
4	10.6	175	7,542
5	15	203	8,367
6	21.3	230	9,411

Dimensions



Extension Rods

K500M/109A K500M/209A K500M/115A K500M/215A White 900mm Black 900mm White 1500mm Black 1500mm

Infinity-iD DC 54"

Scandinavian style designed combining energy efficiency, durability & functionality.

F8020/101A

Wall Control

F8030/101A

Remote / Smart (via app)

White

F8020/202A

Wall Control

F8030/202A

Remote / Smart (via app)



F8030/121A

Remote / Smart (via app)



F8030/222A

Remote / Smart (via app)



F8031/101B

Remote / Smart (via app) CCT Dimmable LED Light



F8031/202B

Remote / Smart (via app) CCT Dimmable LED Light



F8031/121B

Remote / Smart (via app) CCT Dimmable LED Light



F8031/222B

Remote / Smart (via app) CCT Dimmable LED Light





Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Wall Control SMART/Remote
	Remote frequency 2.4 GHz

Reversible SMART/Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-7°
Blade Pitch:	12°
Timer:	1-9 Hour

About the CCT LED Light

Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-MK001 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Performance - Remote / SMART

Speed	Motor Wattage	RPM	Airflow
1	3.4	60	3,420
2	4.6	88	4,644
3	6.8	116	6,049
4	10	145	7,02
5	15.2	174	8,641
6	22.5	200	10,801

Airflow measured in m3/hr

Performance - Wall Control



Speed	Motor Wattage	RPM	Airflow
1	5	90	4,631
2	6.4	112	5,934
3	8.7	135	6,796
4	12	157	7,298
5	16.4	179	8,743
6	23	200	10,859

Dimensions



Extension Rods

K500M/109A K500M/209A K500M/115A K500M/215A White 900mm Black 900mm White 1500mm Black 1500mm

Infinity-iD DC 64 NEW

The Architecturally inspired favourite now available in a larger, 64 inch diameter option for Summer 2023/24.





Spotted Gum

Remote / Smart (via app)

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Wall Control SMART/Remote
	Remote frequency 2.4 GHz

Reversible SMART/Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-7°
Blade Pitch:	12°
Timer:	1-9 Hour

About the CCT LED Light

 Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-MK005 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.

associated with remote as well as the reliability of a fixed wall control.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Performance

Speed	Motor Wattage	RPM	Airflow
1	4.6	60	6,983
2	6.4	85	8,136
3	9.6	109	9,045
4	14.1	133	10,795
5	22.3	156	11,589
6	32.3	180	13,658

Airflow measured in m3/hr

NEW - Tandem Remote / Smart & Wall Control Packages These packages include a remote control, SMART functionality as well as a wired DC wall control. The remote and wall control can work in tandem - providing you with the convenience

Dimensions



Extension Rods

K500M/109A K500M/209A K500M/115A K500M/215A White 900mm Black 900mm White 1500mm Black 1500mm

Studio

The Studio makes low profile fans high tech with two innovative control options to fine tune its airflow.





Indoor ONLY
DC
ABS Plastic
Each Model Varies

Remote frequency 2.4 GHz.

Reversible SMART/Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	Flat Ceilings ONLY
Blade Pitch:	25°

About the CCT LED Light

•	•	•
3000k	4200k	5000k
1300 Lumens	1600 Lumens	1500 Lumens

Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-MK005 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained



Performance Data 48" - Wall Control



Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	6.6	90	4,195
2	8.4	112	5,035
3	11.2	134	6,057
4	16.7	156	7,248
5	22.3	178	8,808
6	30.1	200	10,171


Performance Data 42" - Remote Control


Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.5	60	4,562
2	7.1	97	5,553
3	11.1	136	6,618
4	18.6	178	7,243
5	27.2	214	8,414
6	36.8	250	9,339

Performance Data 48" - Remote Control

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.0	60	3,377
2	6.8	88	4,353
3	10.1	116	5,700
4	15.4	145	6,858
5	21.3	174	8,693
6	30.1	200	10,171

Dimensions

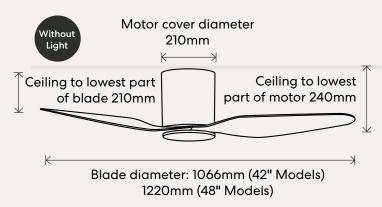

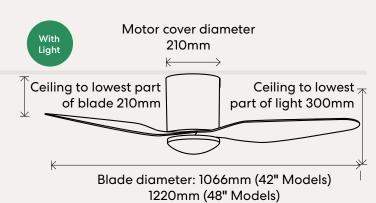

Horizon

Rated for covered outdoor and coastal areas, the expansive Horizon range represents a high airflow cooling solution for almost any space.



F3000/101B - 52" F3020/101B - 64"

Remote / Smart (via app)

F3010/101A - 52" F3030/101A - 64" Wall Control





F3000/202B - 52" F3020/202B - 64" Remote / Smart (via app)

F3010/202A - 52"

F3030/202A - 64"

Wall Control





KF3001/101B- 52" KF3021/101B- 64"

Remote / Smart (via app)





KF3001/202B- 52" KF3021/202B- 64"

Remote / Smart (via app)





Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Wall Control SMART/Remote
	Remote frequency 2.4 GHz

Reversible Remote / Smart:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-15°
Blade Pitch:	17° (Approx)
Timer:	1-9 Hour

About the CCT LED Light

 Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-MK004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

52" Models SMART/Remote Models

64" Models SMART/Remote Models

Speed	Motor Wattage	RPM	Airflow	Speed	Motor Wattage	RPM	Airflow
1	5.3w	60	3,240 m3/hr	1	4.9w	60	6,913 m3/hr
2	6.5w	88	5,760 m3/hr	2	7.1w	88	8,821 m3/hr
3	8.8w	116	7,561 m3/hr	3	11.6w	116	10.881 m3/hr
4	13.1w	145	9,829 m3/hr	4	18.6w	145	13,988 m3/hr
5	18.5w	174	12,277 m3/hr	5	30w	174	17,376 m3/hr
6	25.3w	200	13,862 m3/hr	6	45w	190	19,010 m3/hr


52" Models Wall Control

64" Models Wall Control

Speed	Motor Wattage	RPM	Airflow	Speed	Motor Wattage	RPM	Airflow
1	6.8w	90	5,841 m3/hr	1	7.2w	90	8,865 m3/hr
2	8.5w	112	7,410 m3/hr	2	10.8w	110	10,136 m3/hr
3	11.9w	134	8,651 m3/hr	3	16.7w	130	12,451 m3/hr
4	14.2w	156	10,386 m3/hr	4	19.1w	150	14,537 m3/hr
5	19.5w	178	12,719 m3/hr	5	29.5w	170	17,249 m3/hr
6	25.3w	200	13,862 m3/hr	6	45w	190	19,010 m3/hr

Dimensions

Canopy cover diameter 150mm

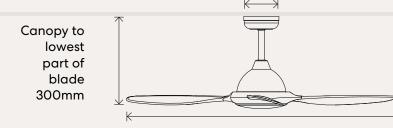

Canopy to lowest part of motor 320mm With light kit installed 330mm

Blade diameter: 1320mm (52" Models) | 1625mm (64" Models)

Extension Rods

K500M/109A White 900mm K500M/209A Black 900mm K500M/115A White 1500mm K500M/215A Black 1500mm

Origin DC

3 blades entwine around an oval shaped motor, eye catching with superior airflow.









F0001/000B - 56" LED Light Kit Can be added to all models



Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS
Operation:	Remote Control
	Remote frequency 433 MHz

Reversible:	Yes (via remote)
Ceiling Mount Angle:	0-13°
Blade Pitch:	Highly Curved Blade

About the CCT LED Light

•	•	•
3000k	4000k	5000k
1163 Lumens	1281 Lumens	1239 Lumens

Light Type: LED (18w)

Dimmable: No

Performance

Speed	Motor Wattage	RPM	Airflow
1	2w	46	3,189 m3/hr
2	4w	96	6,655 m3/hr
3	8w	130	9,011 m3/hr
4	12w	147	10,190 m3/hr
5	21w	174	12,062 m3/hr
6	38w	207	14,349 m3/hr



Ceiling to lowest part of blade 310mm Ceiling to lowest part of motor 385mm Blade diameter 1420mm

Extension Rods

 K503M/109A
 K503M/509A
 K503M/215A


 White 900mm
 Koa 900mm
 Black 1500mm

 K503M/209A
 K503M/115A
 K503M/515A

 Black 900mm
 White 1500mm
 Koa 1500mm

Wynd

Earthly design features with luxuriously hand crafted timber blades.

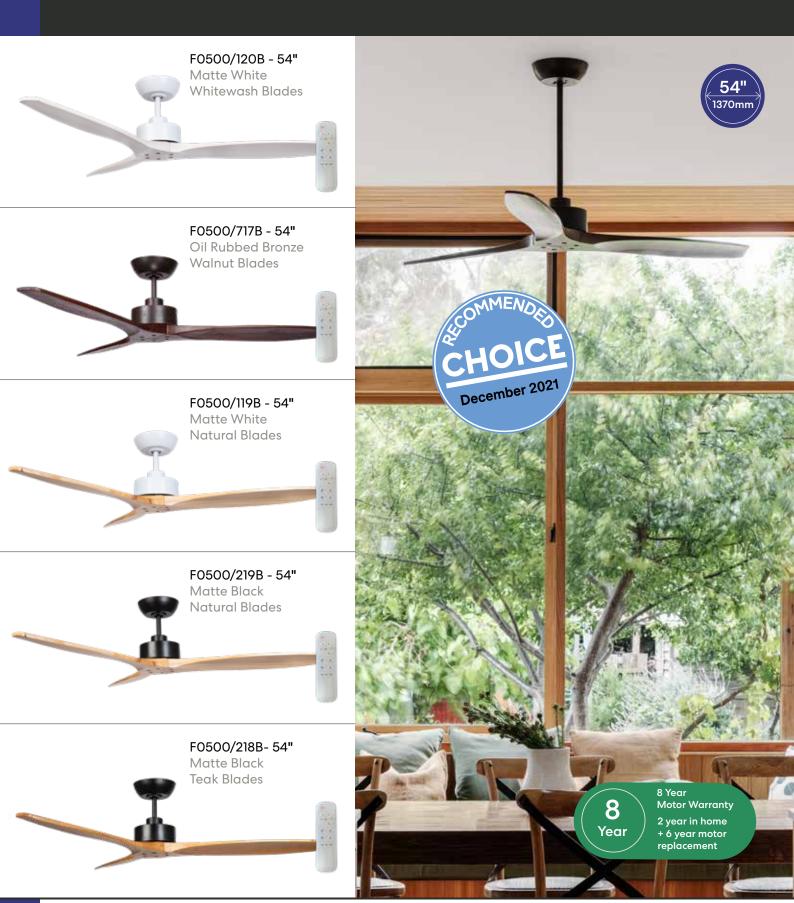

Indoor ONLY
DC
Solid Timber
Remote Control

Remote frequency 433 MHz


Reversible:	Yes (via remote)
Ceiling Mount Angle:	0-13°
Blade Pitch:	13° (Approx)

Performance

Speed	Motor Wattage	RPM	Airflow
1	3w	48	2,832 m3/hr
2	6w	93	5,266 m3/hr
3	9w	124	7,022 m3/hr
4	13w	145	8,211 m3/hr
5	22w	175	9,910 m3/hr
6	32w	197	11,043 m3/hr



Dimensions

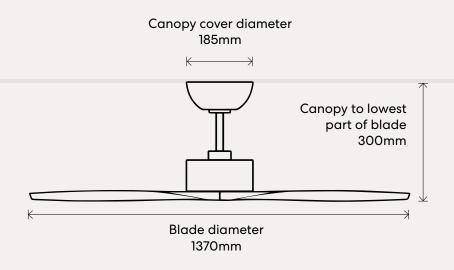

Extension Rods

KOO4M/106A Matte White 600mm

KOO4M/112A Matte White 1200mm KOO4M/706A Oil Rubbed Bronze 600mm


KOO4M/712A Oil Rubbed Bronze 1200mm KOO4M/206A Black 600mm

KOO4M/212A Black 1200mm

Sanctuary

DC 52"

New for 2023/24 - the stunning solid timber sanctuary is now available in a practical 52" size - perfect for bedrooms!

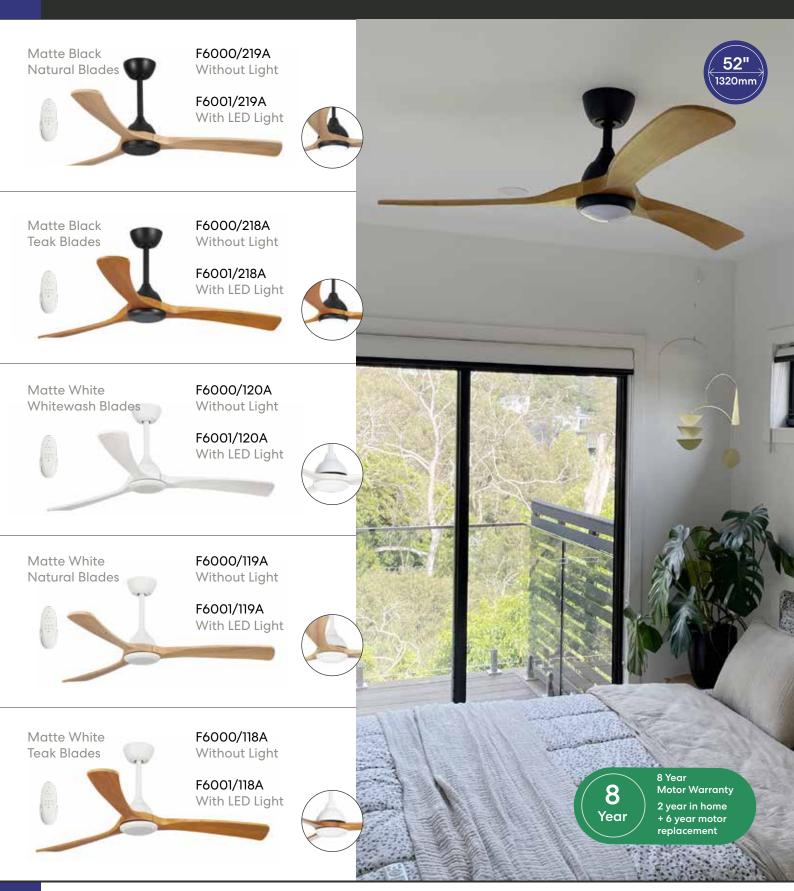

Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Operation:	Remote Control

Remote frequency 433 MHz

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	0-15°
Blade Pitch:	10° (Approx)

About the CCT LED Light

•	•	•
3000k	4000k	6000k
1356 Lumens	1600 Lumens	1421 Lumens

Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-FM001 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Performance 52" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.7w	69	3,012
2	7.8w	94	3,820
3	11.5w	113	4,010
4	16.2w	133	5,332
5	25.4w	155	7,020
6	40w	181	8,860



Dimensions Supplied with 2 extension rods in the box 125mm Canopy cover diameter 250mm 150mm Ceiling to lowest Ceiling to lowest Ceiling to part of blade part of motor **lowest** 288mm / 412mm 314mm / 439mm part of light 338mm 463mm Blade diameter 1320mm - 52" Models


Extension Rods

Matte Black 900mm White 900mm Matte Black 1800mm White 1800mm Without Light Without Light Without Light Without Light K505M/209A K505M/109A K505M/218A K505M/118A With Light With Light With Light With Light K5061/109A K5061/209A K5061/218A K5061/118A

Sanctuary

DC 70"

A stunning fan to improve airflow and cooling in open plan areas and covered outdoor spaces. Now available with or without LED light.

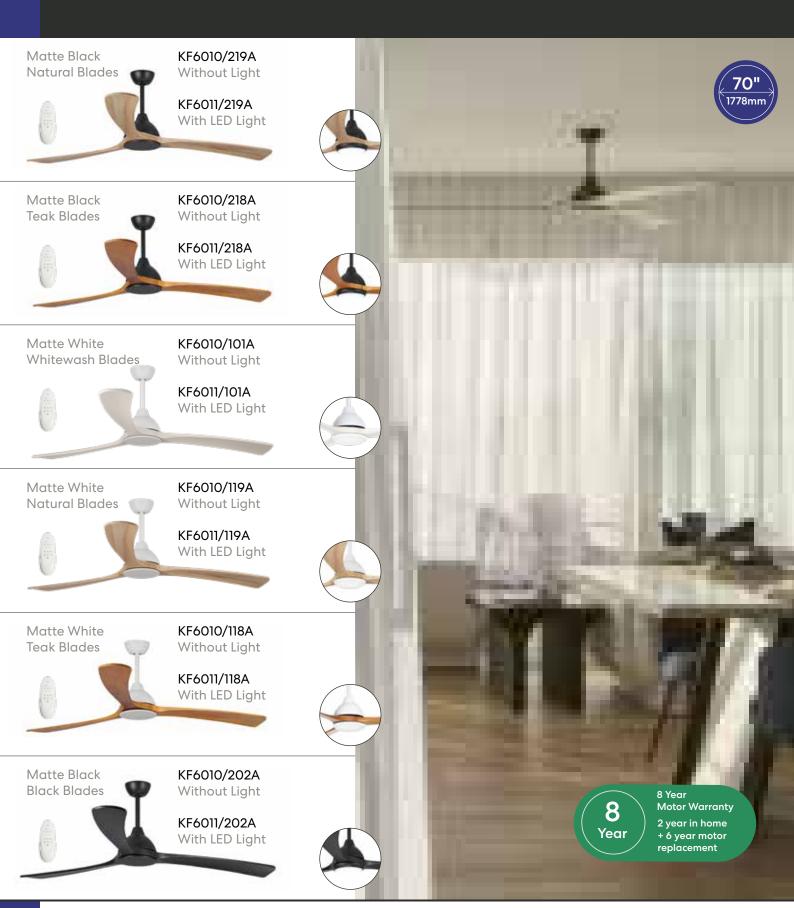

Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Operation:	Remote Control

Remote	frequency	433	MHz

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	0-15°
Blade Pitch:	10° (Approx)

About the CCT LED Light

•	•	•
3000k	4000k	6000k
1435 Lumens	1474 Lumens	1461 Lumens

Light Type: LED (24w)

Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Performance 70" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.4w	55	3,150
2	10.3w	86	5,230
3	15w	103	6,879
4	20w	115	8,520
5	26w	128	9,053
6	38w	147	11,176




Dimensions

Canopy cover diameter 150mm K Supplied with 2 extension rods in the box 125mm 250mm

Ceiling to

lowest

part of light 392mm 517mm

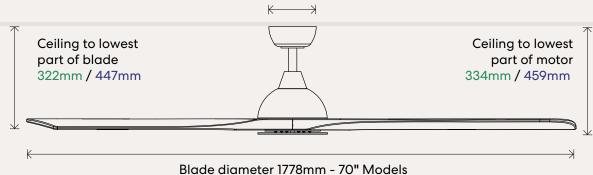

Extension Rods

Matte Black 900mm	White 900mm	Matte Black 1800mm	White 1800mm
Without Light	Without Light	Without Light	Without Light
K505M/209A	K505M/109A	K505M/218A	K505M/118A
With Light	With Light	With Light	With Light
K5061/209A	K5061/109A	K5061/218A	K5061/118A

Sanctuary XLDC

Drawing broad strokes from solid timber blades, the Fanco Sanctuary creates an instant refuge from the heat.



KF6020/219A - 86" KF6030/219A - 92" Without Light

KF6021/219A - 86" KF6031/219A - 92" With LED Light



KF6020/218A - 86" KF6030/218A - 92" Without Light

KF6021/218A - 86" KF6031/218A - 92" With LED Light



KF6020/101A - 86" KF6030/101A - 92" Without Light

KF6021/101A - 86" KF6031/101A - 92" With LED Light



KF6020/119A - 86" KF6030/119A - 92" Without Light

KF6021/119A - 86" KF6031/119A - 92" With LED Light



KF6020/118A - 86" KF6030/118A - 92" Without Light

KF6021/118A - 86" KF6031/118A - 92" With LED Light

Matte Black
Black Blades

KF6020/202A - 86"
KF6030/202A - 92"

Without Light

KF6021/202A - 86"

KF6031/202A - 92"

With LED Light



Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Operation:	Remote Control

Remote frequency 433 MHz

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	0-15°
Blade Pitch:	10° (Approx)

About the CCT LED Light

 Light Type: LED (24w)

Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Performance 86" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	12w	78	3,460
2	15.6w	87	6,569
3	22.2w	98	9.089
4	30w	110	11,246
5	39.8w	121	12,005
6	54.3w	131	14,052

Performance 92" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	12w	75	3,610
2	15.7w	86	7,796
3	22.5w	93	11,152
4	30.4w	105	12,896
5	40w	116	14,058
6	54.8w	127	16,235

Dimensions

This fan requires a minimum ceiling height of 2.7m.

Canopy cover diameter
150mm

Supplied with a 250mm rod which results in larger than average ceiling to blade drop.



Extension Rods

Matte Black 900mm
Without Light
K505M/209A
With Light
K5061/209A
With Light
K5061/109A

Matte Black 1800mm Without Light K505M/218A With Light K5061/218A

White 1800mm Without Light K505M/118A With Light K5061/118A

Urban-iD

Classic Urban 2 design featuring reversible plywood blades.



Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	Plywood
Operation:	Remote Control

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	0-10°
Blade Pitch:	7° (Approx)

About the CCT LED Light

1850 Lumens

Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-FL003 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained


1880 Lumens

Performance

1870 Lumens

Speed	Motor Wattage	RPM	Airflow
1	4w	80	4,080 m3/hr
2	9.8w	109	6,180 m3/hr
3	15.3w	135	7,800 m3/hr
4	21.9w	159	9,300 m3/hr
5	27.7w	186	10,860 m3/hr
6	33.6w	210	12,480 m3/hr



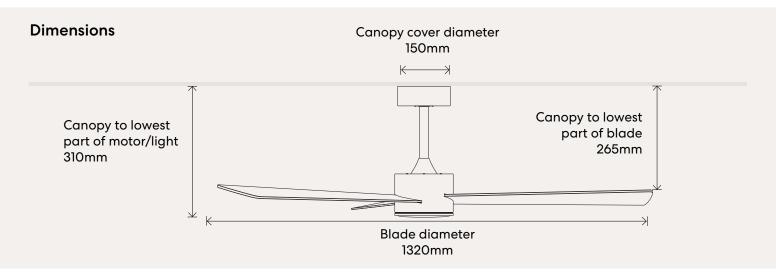

Extension Rods

K507M/106A K507M/206A K507M/112A K507M/212A White 600mm Black 600mm White 1200mm Black 1200mm



www.fanco.com.au