## fanco

Ceiling Fan Collection 2024

## **Collection Index**



Model	Page No	Motor	Blade	Location	Control	Size Options	Light Option	Warranty	Colour Options
Breeze	3-4	AC	ABS Plastic	Indoor Outdoor* Coastal	Wall Control	52" <sub>1320mm</sub>	18W CCT LED Not Dimmable	2 year in home + 6 year motor replacement*	
Eco Style	5 - 8	DC	ABS Plastic	Indoor Outdoor*	Remote Control	52" 60" 1520mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Eco Silent	9 - 10	DC	Plywood	Indoor	Remote / Wall Control	48" (52" ) 1220mm (1320mm)	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Eco Silent Deluxe	11 - 12	DC	ABS Plastic	Indoor Outdoor* Coastal	Remote / SMART (VIA APP) Wall Control	52" 1320mm (56" 1420mm)	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Infinity-iD CHOICE	13 - 18	DC	ABS Plastic	Indoor Outdoor* Coastal	Remote / SMART (VIA APP) Wall Control	48" (54" (64" (1625mm) (1625mm) (1625mm)	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Studio	19 - 20	DC	ABS Plastic	Indoor	Remote / SMART (VIA APP) Wall Control	42" 1066mm 48" 1220mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Horizon	21 - 22	DC	ABS Plastic	Indoor Outdoor* Coastal	Remote / SMART (VIA APP) Wall Control	52" (64" 1625mm)	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Origin	23 - 24	DC	ABS Plastic	Indoor Outdoor*	Remote Control	56" 1420mm	18W CCT LED Not Dimmable	2 year in home + 6 year motor replacement*	
Wynd	25 - 26 —	DC	Solid Timber	Indoor	Remote Control	54" 1370mm	No Light	2 year in home + 6 year motor replacement*	
Sanctuary	27 - 30	DC	Solid Timber	Indoor Outdoor* Coastal	Remote Control	52" 70" 1778mm	24W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Sanctuary XL	31 -32	DC	Solid Timber	Indoor Outdoor* Coastal	Remote Control	86" 2184mm 2340mm	24W CCT LED Dimmable	2 year in home + 6 year motor replacement*	
Urban-iD	33 - 34	DC	Plywood	Indoor	Remote Control	52" 1320mm	18W CCT LED Dimmable	2 year in home + 6 year motor replacement*	

<sup>\*</sup>All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

<sup>\*6</sup> year motor replacement upon product registration - register product online within 90 days of purchase.

## Breeze



Flowing design that produces a calming breeze. The perfect complement to a modern living space.

## **Technical Data**

Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	AC
Blade Material:	ABS Plastic
Operation:	Wall Control

Reversible:	Yes (via motor)		
Ceiling Mount Angle:	0-20°		
Blade Pitch:	12° (Approx)		



F0100/101A White No Light



F0100/202A Black No Light



F0100/205A Black / Koa No Light



F0100/121A White / Beechwood No Light



F0101/101A White LED Light



F0101/202A Black LED Light



F0101/205A Black / Koa LED Light



F0101/121A White / Beechwood LED Light





## About the CCT LED Light

•	•	•	Light
3000k	4000k	6000k	Dimm
1408 Lumens	1501 Lumens	1474 Lumens	

Light Type: LED (18w)


Dimmable: No

## Performance

Speed	Motor Wattage	RPM	Airflow
1	18w	107	4,707 m3/hr
2	34w	153	7,132 m3/hr
3	55w	197	9,732 m3/hr

Anti-corrosive paint applied on all metal components & ABS blades make this fan suitable for coastal environment installation

## **Dimensions**

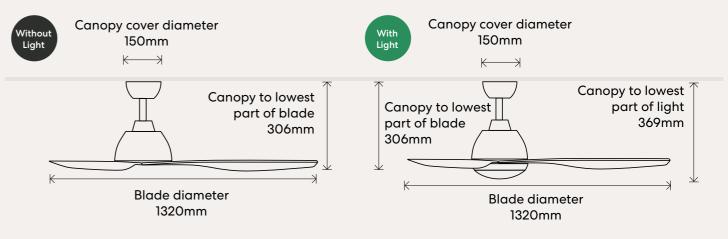

## **Extension Rods**

K505M/109A	K505M/118A
White 900mm	White 1800mm
K505M/209A	K505M/218A
Black 900mm	Black 1800mm

fanco

## Eco Style DC 52

A contemporary three blade design to complement modern decor inside and outside the home.













**CCT LED Light** 



F4011/121A White / Beechwood **CCT LED Light** 







## **Technical Data**

## **Key Details**

Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Remote Control

Remote frequency 433 MHz

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	0-15°
Blade Pitch:	15° (Approx)

LED (18w)

## **About the CCT LED Light**

3000k 4000k 5700k 1408 Lumens 1501 Lumens 1474 Lumens Dimmable: Yes (8 Steps)

Light Type:

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




## Performance - No Light Models


Speed	Motor Wattage	RPM	Airflow
1	4.2w	74	5,050 m3/hr
2	6.6w	106	6,589 m3/hr
3	9.7w	129	7,846 m3/hr
4	14.8w	153	8,326 m3/hr
5	20.3w	171	9,035 m3/hr
6	35w	208	10,486 m3/hr

## **Performance - LED Light Models**

Speed	Motor Wattage	RPM	Airflow
1	6.8w	90	6,150 m3/hr
2	10.4w	123	7,680 m3/hr
3	15w	142	8,063 m3/hr
4	21w	161	8,540 m3/hr
5	27w	175	9,580 m3/hr
6	36w	195	10,395 m3/hr

## **Dimensions**

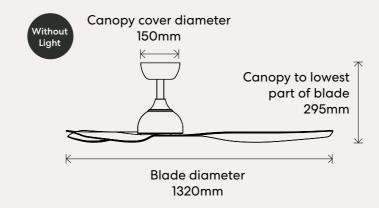

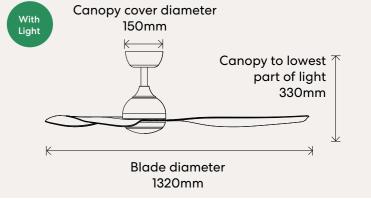

## Extension Rods - No Light Models

K505M/118A K505M/109A White 900mm White 1800mm

K505M/209A K505M/218A Black 900mm Black 1800mm

## **Extension Rods - LED Light Models**

K5061/109A K5061/118A White 900mm White 1800mm K5061/209A K5061/218A Black 900mm Black 1800mm

## Eco Style DC 60 The style of the style of

K4020/101A

A contemporary large diameter three blade design well suited to larger living spaces.





## **Technical Data**

## **Key Details**

Indoor / Outdoor\* Install Location: DC Motor Type: **ABS Plastic** Blade Material: Remote Control Operation:

Remote frequency 433 MHz

1461 Lumens

Reversible:	Yes (via remote)
Timer:	1H / 4H / 8H
Ceiling Mount Angle:	O-15°
Blade Pitch:	15° (Approx)

LED (24w)

Yes (8 Steps)

## About the CCT LED Light

3000k 4000k 6000k

1474 Lumens

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.

Light Type:

Dimmable:



## **Performance**


1435 Lumens


Speed	Motor Wattage	RPM	Airflow
1	5.6w	80	6,880 m3/hr
2	8.3w	96	8,050 m3/hr
3	11w	113	9,290 m3/hr
4	17w	136	10,500 m3/hr
5	27w	164	13,500 m3/hr
6	40w	191	15,200 m3/hr



## **Dimensions**

Black 900mm

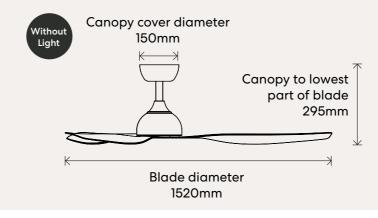

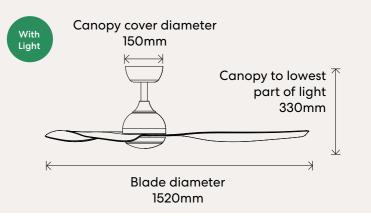

## **Extension Rods - No Light Models**

K505M/109A K505M/118A White 900mm White 1800mm K505M/218A K505M/209A

Black 1800mm

**Extension Rods - LED Light Models** 

K5061/109A K5061/118A White 900mm White 1800mm K5061/209A K5061/218A Black 900mm Black 1800mm

## **Eco Silent**

Modern design combining performance with quality.





## **Technical Data**

Install Location:	Indoor	Reversible Remote
Motor Type:	DC	Reversible Wall Co
Blade Material:	Timber	Ceiling Mount Ang
Operation:	Wall Control   Remote	Blade Pitch:
	Remote frequency 2.4 GHz	Timer·

Reversible Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-15°
Blade Pitch:	13° (Approx)
Timer:	1-9 Hour

LED (18w)

## About the CCT LED Light

 Dimmable: Yes (8 Steps)

SP13-MK002 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



10

LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## 48" Remote

Speed	Wattage	RPM	Airflow
1	3.6w	60	3,061 m3/hr
2	4.5w	90	4,253 m3/hr
3	6.7w	125	5,608 m3/hr
4	9.4w	161	6,997 m3/hr
5	14.1w	183	8,079 m3/hr
6	19.4w	215	9,601 m3/hr

## 52" Remote

Light Type:

Speed	Wattage	RPM	Airflow
1	5w	60	3,911 m3/hr
2	7w	90	5,242 m3/hr
3	10w	122	6,394 m3/hr
4	16w	151	7,454 m3/hr
5	25w	185	9,202 m3/hr
6	35w	215	11,060 m3/hr


## 48" Wall Control


Speed	Wattage	RPM	Airflow
1	4.7w	90	4,295 m3/hr
2	5.8w	116	4,986 m3/hr
3	8.4w	143	6,352 m3/hr
4	10.2w	162	7,021 m3/hr
5	15.4w	189	8,154 m3/hr
6	20.1w	215	9,601 m3/hr

## 52" Wall Control

Speed	Wattage	RPM	Airflow
1	7w	90	5,256 m3/hr
2	9.5w	115	6,156 m3/hr
3	13.5w	140	7,038 m3/hr
4	20.6w	165	8,473 m3/hr
5	26.2w	190	9,474 m3/hr
6	35w	215	11,060 m3/hr

## **Dimensions**

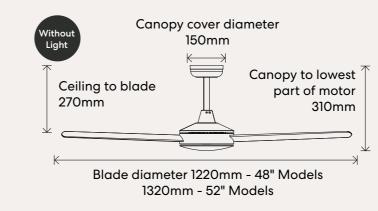

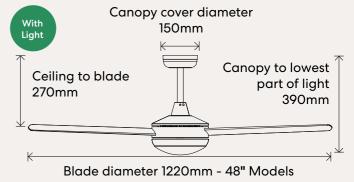

**Extension Rods** 

K500M/109A K500M/215A White 900mm White 1500mm

## Eco Silent Deluxe DC

11

The Eco Silent Deluxe packages all of the year's innovations in a straightforward four blade design.



## **Technical Data**

	Remote frequency 2.4 GHz
Operation:	Wall Control   SMART/Remote
Blade Material:	ABS Plastic
Motor Type:	DC
Install Location:	Indoor / Outdoor* & Coastal

Reversible Remote / Smart:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-15°
Blade Pitch:	13° (Approx)
Timer:	1-9 Hour

LED (18w)

## About the CCT LED Light

 Dimmable: Yes (8 Steps)

SP13-MK002 - User Replaceable LED Light

SP13-MK002 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## 52" SMART / Remote

Speed	Wattage	RPM	Airflow
1	5w	60	3,911 m3/hr
2	7w	90	5,242 m3/hr
3	10w	122	6,394 m3/hr
4	16w	151	7,454 m3/hr
5	25w	185	9,202 m3/hr
6	35w	215	11,060 m3/hr

## 56" SMART / Remote

Light Type:

Speed	Wattage	RPM	Airflow
1	5w	60	5,631 m3/hr
2	7w	88	6,953 m3/hr
3	10w	116	8,824 m3/hr
4	15w	145	10,630 m3/hr
5	24w	174	13,874 m3/hr
6	35w	200	15,639 m3/hr


## 52" Wall Control

Speed	Wattage	RPM	Airtlow
1	7w	90	5,256 m3/hr
2	9.5w	115	6,156 m3/hr
3	13.5w	140	7,038 m3/hr
4	20.6w	165	8,473 m3/hr
5	26.2w	190	9,474 m3/hr
6	35w	215	11,060 m3/hr

56"	Wall	Control

Speed	Wattage	RPM	Airflow
1	7.2w	90	7,069 m3/hr
2	9.8w	112	8,648 m3/hr
3	13.7w	136	9,563 m3/hr
4	18.5w	156	11,956 m3/hr
5	25.8w	178	14,021 m3/hı
6	35w	200	15,639 m3/h

## **Dimensions**

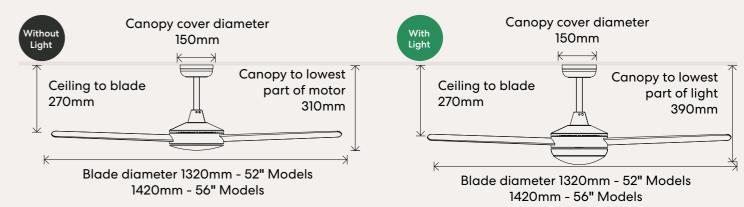

## **Extension Rods**

 K500M/109A
 K500M/209A
 K500M/115A
 K500M/215A

 White 900mm
 Black 900mm
 White 1500mm
 Black 1500mm

## Infinity-iD DC 48 ORDINATION ORDINATION

Scandinavian style designed combining energy efficiency, durability & functionality.

## White F8010/101A Wall Control F8000/101A Remote / Smart (via app)

F8010/202A Wall Control

F8000/202A Remote / Smart (via app)



White / Beechwood

White


White /

Beechwood

F8000/121A Remote / Smart (via app)



F8000/222A Remote / Smart (via app)





CCT Dimmable LED Light

F8001/121B Remote / Smart (via app) CCT Dimmable LED Light







## **Technical Data**

	Remote frequency 2.4 GHz
Operation:	Wall Control   SMART/Remote
Blade Material:	ABS Plastic
Motor Type:	DC
Install Location:	Indoor / Outdoor* & Coastal

Reversible SMART/Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-7°
Blade Pitch:	12°
Timer:	1-9 Hour

## About the CCT LED Light

4200k 3000k 5000k 1300 Lumens 1600 Lumens 1500 Lumens

Yes (8 Steps) Dimmable:


Light Type:

SP13-MK001 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.

LED (18w)

LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## Performance - Remote / SMART

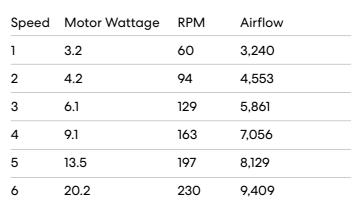

Airflow measured in m3/hr

### Performance - Wall Control Speed Motor Wattage RPM Airflow 90 4.3 4,453 2 5.7 118 5.646 3 6,259 7.6 146 10.6 175 7,542 5 15 203 8,367 21.3 230 9,411

## **Dimensions**



## **Extension Rods**

K500M/109A K500M/209A White 900mm Black 900mm K500M/115A White 1500mm K500M/215A Black 1500mm

www.fanco.com.au fanco 14

## Infinity-iD DC 54

Scandinavian style designed combining energy efficiency, durability & functionality.

## F8020/101A Wall Control

F8030/101A

Remote / Smart (via app)



F8030/202A

Remote / Smart (via app)



Remote / Smart (via app)



White

Black

White /

White /

F8030/222A

F8031/101B Remote / Smart (via app) CCT Dimmable LED Light

Remote / Smart (via app)



## F8031/202B

Remote / Smart (via app) CCT Dimmable LED Light



F8031/222B

Remote / Smart (via app) CCT Dimmable LED Light

Remote / Smart (via app)

CCT Dimmable LED Light





## **Technical Data**

Indoor / Outdoor\* & Coastal Install Location: Motor Type: DC **ABS Plastic** Blade Material: Operation: Wall Control | SMART/Remote

Remote frequency 2.4 GHz

Reversible Wall Control:	No
Ceiling Mount Angle:	0-7°
Blade Pitch:	12°
Timer:	1-9 Hour

## About the CCT LED Light

4200k 3000k 5000k 1300 Lumens 1600 Lumens 1500 Lumens

Yes (8 Steps) Dimmable:

Light Type:

Reversible SMART/Remote: Yes

SP13-MK001 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.

Performance - Wall Control

16.4

23

0


8,743

10,859

LED (18w)

LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## Performance - Remote / SMART

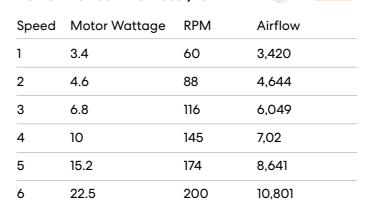

Airflow measured in m3/hr

### Speed Motor Wattage RPM Airflow 90 5 4,631 2 6.4 112 5.934 3 135 8.7 6,796 12 157 7,298

179

200

## **Dimensions**



## **Extension Rods**

K500M/109A K500M/209A White 900mm Black 900mm K500M/115A White 1500mm K500M/215A Black 1500mm

www.fanco.com.au fanco 15

## Infinity-iD DC 64 NEW

White

Black

White /

Black /

White

Spotted Gum

Beechwood

The Architecturally inspired favourite now available in a larger, 64 inch diameter option for Summer 2023/24.

## F8040/101A Remote / Smart (via app)

F8050/101B

Remote / Smart & Wall Control

F8040/202A Remote / Smart (via app) F8050/202B

Remote / Smart & Wall Control

F8040/121A Remote / Smart (via app)

F8050/121B Remote / Smart & Wall Control

F8040/222A Remote / Smart (via app)

F8050/222B Remote / Smart & Wall Control

F8041/101A Remote / Smart (via app)

Black F8041/202A Remote / Smart (via app)

F8041/121A



F8041/222A Remote / Smart (via app)





## **Technical Data**

Install Location: Indoor / Outdoor\* & Coastal Motor Type: DC **ABS Plastic** Blade Material: Operation: Wall Control | SMART/Remote

Remote frequency 2.4 GHz

Reversible SMART/Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-7°
Blade Pitch:	12°
Timer:	1-9 Hour

LED (18w)

## About the CCT LED Light

4200k 3000k 5000k 1600 Lumens 1300 Lumens 1500 Lumens

Dimmable: Yes (8 Steps) SP13-MK005 - User Replaceable LED Light

Panel. Plug in LED panel can be replaced without an electrician.

Light Type:

LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## **Performance**

Speed	Motor Wattage	RPM	Airflow
1	4.6	60	6,983
2	6.4	85	8,136
3	9.6	109	9,045
4	14.1	133	10,795
5	22.3	156	11,589
6	32.3	180	13,658

Airflow measured in m3/hr

## **NEW - Tandem Remote / Smart & Wall Control Packages**

a remote control, SMART functionality as well as a wired DC wall control. The remote and wall control can work in tandem providing you with the convenience associated with remote as well as the reliability of a fixed wall control.

These packages include

## **Dimensions**



**Extension Rods** 

K500M/109A K500M/209A White 900mm Black 900mm K500M/115A White 1500mm K500M/215A Black 1500mm

www.fanco.com.au 18 fanco 17

## Studio

The Studio makes low profile fans high tech with two innovative control options to fine tune its airflow.

## F9000/101A - 42" F9010/101A - 48" White No Light Remote / Smart (via app)

F9020/101A - 48" Wall Control

## F9000/121A - 42" F9010/121A - 48" White / Beechwood No Light Remote / Smart (via app)







## **Technical Data**

Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	ABS Plastic
Operation:	Each Model Varies
	Remote frequency 2.4 GHz.

Reversible SMART/Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	Flat Ceilings ONLY
Blade Pitch:	25°

## About the CCT LED Light

 Light Type: LED (18w)

Dimmable: Yes (8 Steps)

SP13-MK005 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained



## Performance Data 42" - Remote Control

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.5	60	4,562
2	7.1	97	5,553
3	11.1	136	6,618
4	18.6	178	7,243
5	27.2	214	8,414
6	36.8	250	9,339

## Performance Data 48" - Wall Control





Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	6.6	90	4,195
2	8.4	112	5,035
3	11.2	134	6,057
4	16.7	156	7,248
5	22.3	178	8,808
6	30.1	200	10,171

## Performance Data 48" - Remote Control

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.0	60	3,377
2	6.8	88	4,353
3	10.1	116	5,700
4	15.4	145	6,858
5	21.3	174	8,693
6	30.1	200	10,171

## **Dimensions**

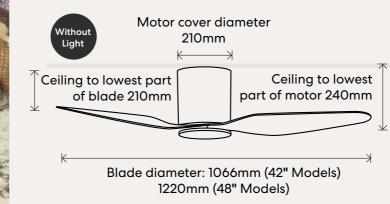

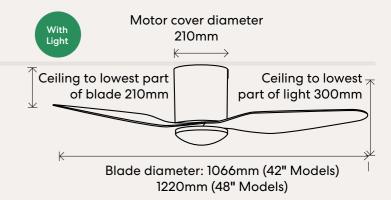

## Horizon

Rated for covered outdoor and coastal areas, the expansive Horizon range represents a high airflow cooling solution for almost any space.












## **Technical Data**

	Remote frequency 2.4 GHz	Timer:	1-9 Hour
Operation:	Wall Control   SMART/Remote	Blade Pitch:	17° (Approx)
Blade Material:	ABS Plastic	Ceiling Mount Angle:	0-15°
Motor Type:	DC	Reversible Wall Control:	No
Install Location:	Indoor / Outdoor* & Coastal	Reversible Remote / Smart:	Yes

## About the CCT LED Light

3000k 4200k 5000k 1300 Lumens 1600 Lumens 1500 Lumens Light Type: LED (18w) Yes (8 Steps) Dimmable:

SP13-MK004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## **52" Models** SMART/Remote Models

	•		
Speed	Motor Wattage	RPM	Airflow
1	5.3w	60	3,240 m3/hr
2	6.5w	88	5,760 m3/hr
3	8.8w	116	7,561 m3/hr
4	13.1w	145	9,829 m3/hr
5	18.5w	174	12,277 m3/hr
6	25.3w	200	13,862 m3/hr

## **64" Models** SMART/Remote Models

Speed	Motor Wattage	RPM	Airflow
1	4.9w	60	6,913 m3/hr
2	7.1w	88	8,821 m3/hr
3	11.6w	116	10.881 m3/hr
4	18.6w	145	13,988 m3/hr
5	30w	174	17,376 m3/hr
6	45w	190	19,010 m3/hr

## 52" Models Wall Control

Speed	Motor Wattage	RPM	Airflow
1	6.8w	90	5,841 m3/hr
2	8.5w	112	7,410 m3/hr
3	11.9w	134	8,651 m3/hr
4	14.2w	156	10,386 m3/hr
5	19.5w	178	12,719 m3/hr
6	25.3w	200	13,862 m3/hr

## 64" Models Wall Control

otor Wattage	RPM	Airflow	Speed	Motor Wattage	RPM	Airflow
Вw	90	5,841 m3/hr	1	7.2w	90	8,865 m3/hr
5w	112	7,410 m3/hr	2	10.8w	110	10,136 m3/hr
9w	134	8,651 m3/hr	3	16.7w	130	12,451 m3/hr
.2w	156	10,386 m3/hr	4	19.1w	150	14,537 m3/hr
.5w	178	12,719 m3/hr	5	29.5w	170	17,249 m3/hr
5.3w	200	13,862 m3/hr	6	45w	190	19,010 m3/hr

### **Dimensions**

## Canopy cover diameter 150mm

Canopy to lowest part of blade 300mm

Canopy to **lowest** part of motor 320mm

With light kit installed 330mm

Blade diameter: 1320mm (52" Models) | 1625mm (64" Models)

## **Extension Rods**

K500M/109A White 900mm

K500M/209A Black 900mm K500M/115A White 1500mm K500M/215A Black 1500mm

www.fanco.com.au fanco 22

## Origin

3 blades entwine around an oval shaped motor, eye catching with superior airflow.









F0001/000B - 56" LED Light Kit Can be added to all models



## **Technical Data**

Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS
Operation:	Remote Control
	Remote frequency 433 MHz

Reversible:	Yes (via remote)		
Ceiling Mount Angle:	0-13°		
Blade Pitch:	Highly Curved Blade		

## About the CCT LED Light

•	•	•	Light Type:	LED (18w)	
3000k 1163 Lumens	4000k 1281 Lumens	5000k 1239 Lumens	Dimmable:	No	

## **Performance**

Speed	Motor Wattage	RPM	Airflow
1	2w	46	3,189 m3/hr
2	4w	96	6,655 m3/hr
3	8w	130	9,011 m3/hr
4	12w	147	10,190 m3/hr
5	21w	174	12,062 m3/hr
6	38w	207	14,349 m3/hr



## **Dimensions** Canopy cover diameter 189mm Ceiling to lowest part of blade Ceiling to lowest part of motor 385mm 310mm Blade diameter 1420mm

## **Extension Rods**

K503M/109A	K503M/509A	K503M/215A
White 900mm	Koa 900mm	Black 1500mm
K503M/209A	K503M/115A	K503M/515A
Black 900mm	White 1500mm	Koa 1500mm

## Wynd DC

Earthly design features with luxuriously hand crafted timber blades.













## **Technical Data**

Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	Solid Timber
Operation:	Remote Control

Remote frequency 433 MHz


Reversible:	Yes (via remote)		
Ceiling Mount Angle:	0-13°		
Blade Pitch:	13° (Approx)		

## **Performance**

Speed	Motor Wattage	RPM	Airflow
1	3w	48	2,832 m3/hr
2	6w	93	5,266 m3/hr
3	9w	124	7,022 m3/hr
4	13w	145	8,211 m3/hr
5	22w	175	9,910 m3/hr
6	32w	197	11,043 m3/hr



## **Dimensions**

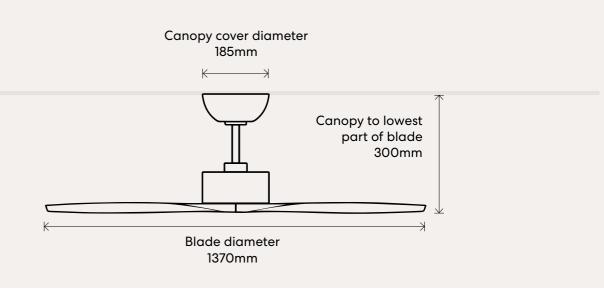

## **Extension Rods**


KOO4M/106A	KOO4M/706A	KOO4M/206A
Matte White 600mm	Oil Rubbed Bronze 600mm	Black 600mm
KOO4M/112A	KOO4M/712A	KOO4M/212A
Matte White 1200mm	Oil Rubbed Bronze 1200mm	Black 1200mm

## Sanctuary

DC 52"

27

New for 2023/24 - the stunning solid timber sanctuary is now available in a practical 52" size - perfect for bedrooms!

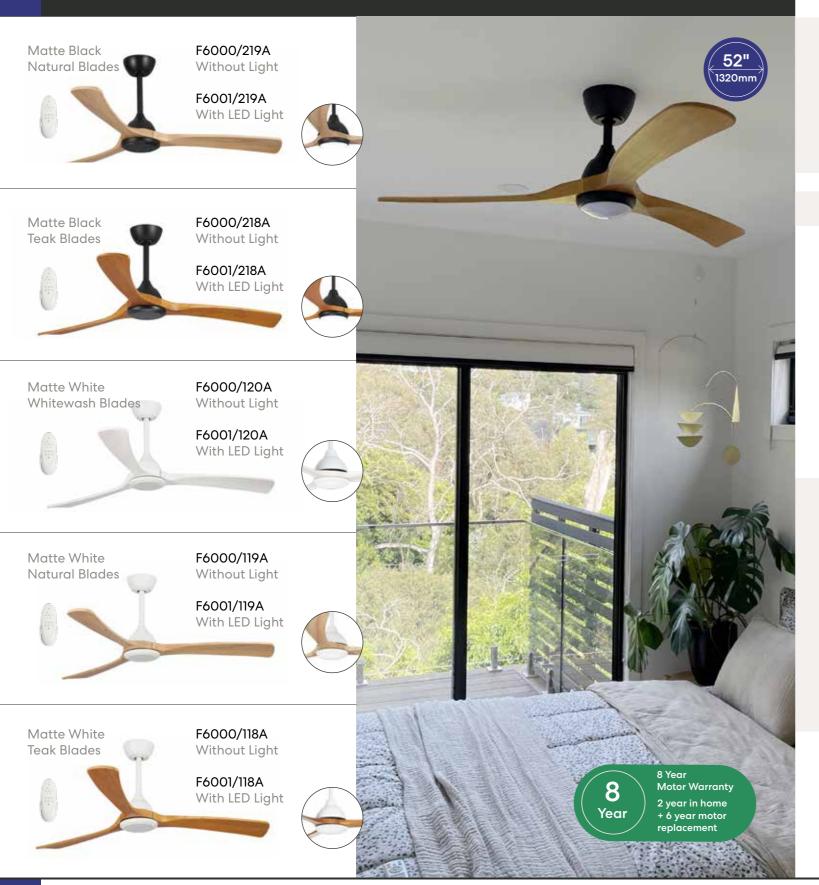

## **Technical Data**

Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Operation:	Remote Control
	Daniela fra

Yes (via remote)		
1H / 4H / 8H		
0-15°		
10° (Approx)		

Remote frequency 433 MHz

## About the CCT LED Light

3000k 4000k 6000k 1356 Lumens 1600 Lumens 1421 Lumens

LED (18w) Light Type: Yes (8 Steps) Dimmable:

SP13-FM001 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

## Performance 52" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.7w	69	3,012
2	7.8w	94	3,820
3	11.5w	113	4,010
4	16.2w	133	5,332
5	25.4w	155	7,020
6	40w	181	8,860



Supplied with 2 extension rods in the box

## **Dimensions**

### 125mm Canopy cover diameter 250mm 150mm Ceiling to Ceiling to lowest Ceiling to lowest part of blade part of motor **lowest** 288mm / 412mm 314mm / 439mm part of light 338mm 463mm Blade diameter 1320mm - 52" Models


## **Extension Rods**

Matte Black 900mm	White 900mm	Matte Black 1800mm	White 1800mm
Without Light	Without Light	Without Light	Without Light
K505M/209A	K505M/109A	K505M/218A	K505M/118A
With Light	With Light	With Light	With Light
K5061/209A	K5061/109A	K5061/218A	K5061/118A

## Sanctuary

DC 7/0"

A stunning fan to improve airflow and cooling in open plan areas and covered outdoor spaces. Now available with or without LED light.

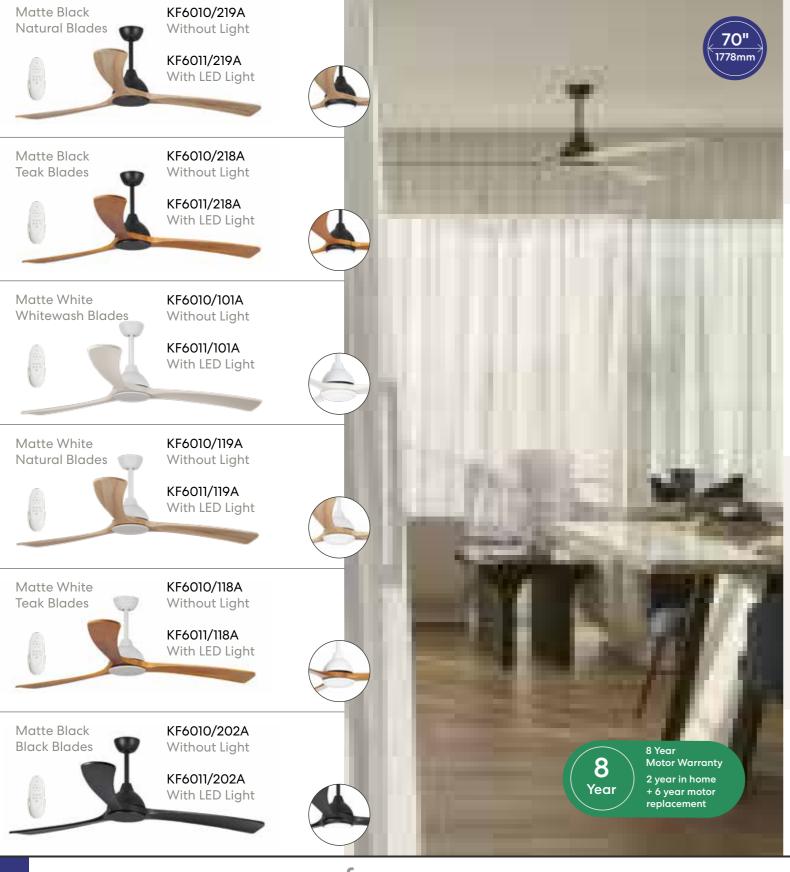

## **Technical Data**

Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Operation:	Remote Control
	Remote frequency 433 MHz

Yes (via remote)	
1H / 4H / 8H	
0-15°	
10° (Approx)	

LED (24w)

## About the CCT LED Light

 Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Light Type:

## Performance 70" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	5.4w	55	3,150
2	10.3w	86	5,230
3	15w	103	6,879
4	20w	115	8,520
5	26w	128	9,053
6	38w	147	11,176



Supplied with 2 extension rods in the box

## **Dimensions**

### 125mm Canopy cover diameter 250mm 150mm Ceiling to lowest Ceiling to lowest Ceiling to part of blade part of motor lowest 322mm / 447mm 334mm / 459mm part of light 392mm 517mm Blade diameter 1778mm - 70" Models

## **Extension Rods**

Matte Black 900mm	White 900mm	Matte Black 1800mm	White 1800mm
Without Light	Without Light	Without Light	Without Light
K505M/209A	K505M/109A	K505M/218A	K505M/118A
With Light	With Light	With Light	With Light
K5061/209A	K5061/109A	K5061/218A	K5061/118A

## Sanctuary

## 

Drawing broad strokes from solid timber blades, the Fanco Sanctuary creates an instant refuge from the heat.





KF6021/219A - 86" KF6031/219A - 92" With LED Light



KF6020/218A - 86" KF6030/218A - 92" Without Light

KF6021/218A - 86" KF6031/218A - 92" With LED Light



KF6020/101A - 86" KF6030/101A - 92" Without Light

KF6021/101A - 86" KF6031/101A - 92" With LED Light



KF6020/119A - 86" KF6030/119A - 92" Without Light

KF6021/119A - 86" KF6031/119A - 92" With LED Light



KF6020/118A - 86" KF6030/118A - 92" Without Light

KF6021/118A - 86" KF6031/118A - 92" With LED Light



KF6020/202A - 86" KF6030/202A - 92" Without Light

KF6021/202A - 86" KF6031/202A - 92" With LED Light



## **Technical Data**

Install Location:	Indoor/Outdoor* & Coastal
Motor Type:	DC
Blade Material:	Solid Timber
Operation:	Remote Control
	Domesto fraguesco (122 MIII-

Timer:	1H / 4H / 8H	
Ceiling Mount Angle:	0-15°	
Blade Pitch:	10° (Approx)	

Yes (via remote)

Remote frequency 433 MHz

## About the CCT LED Light

6000k 4000k 3000k 1435 Lumens 1474 Lumens 1461 Lumens Light Type: LED (24w) Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Anti-corrosive paint applied on all metal components & waterproof sealer on solid timber blades

Reversible:

## Performance 86" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	12w	78	3,460
2	15.6w	87	6,569
3	22.2w	98	9.089
4	30w	110	11,246
5	39.8w	121	12,005
6	54.3w	131	14,052

## Performance 92" Models

Speed	Motor Wattage	RPM	Airflow (m3/hr)
1	12w	75	3,610
2	15.7w	86	7,796
3	22.5w	93	11,152
4	30.4w	105	12,896
5	40w	116	14,058
6	54.8w	127	16,235

## **Dimensions**

This fan requires a minimum ceiling height of 2.7m.

Canopy cover diameter 150mm

Supplied with a 250mm rod which results in larger than average ceiling to blade drop.

**lowest** 

part of

517mm

light

Ceiling to lowest Ceiling to lowest Ceiling to part of blade part of motor 459mm 447mm

Blade diameter: 2184mm - 86" Models | 2340mm - 92" Models

## **Extension Rods**

Matte Black 900mm	White 900mm	Matte Black 1800mm	White 1800mm
Without Light	Without Light	Without Light	Without Light
K505M/209A	K505M/109A	K505M/218A	K505M/118A
With Light	With Light	With Light	With Light
K5061/209A	K5061/109A	K5061/218A	K5061/118A

## Urban-iD

Classic Urban 2 design featuring reversible plywood blades.









33



## **Technical Data**

Reversible:	
Timer:	
Ceiling Mount Angl	
Blade Pitch:	

Reversible:	Yes (via remote)		
Timer:	1H / 4H / 8H		
Ceiling Mount Angle:	0-10°		
Blade Pitch:	7° (Approx)		

LED (18w)

## About the CCT LED Light

 Dimmable: Yes (8 Steps)

Light Type:

SP13-FL003 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## **Performance**

Speed	Motor Wattage	RPM	Airflow
1	4w	80	4,080 m3/hr
2	9.8w	109	6,180 m3/hr
3	15.3w	135	7,800 m3/hr
4	21.9w	159	9,300 m3/hr
5	27.7w	186	10,860 m3/hr
6	33.6w	210	12,480 m3/hr



# Canopy to lowest part of motor/light 310mm Canopy to lowest part of motor/light 265mm Blade diameter 1320mm

## **Extension Rods**

K507M/106A K507M/206A K507M/112A K507M/212A White 600mm Black 600mm White 1200mm Black 1200mm



www.fanco.com.au