

Eco Silent Deluxe

DC

New model for 2020 / 21.
modern design combining
performance with quality.



fancoo



52" (1320mm) Models

CFFCESD3WHWABS
White - No Light - Wall Control



CFFCESD3WHSRABS
White - No Light - SMART / Remote



CFFCESD3LWHSRABS
White - CCT LED - SMART / Remote



CFFCESD3BLWABS
Black - No Light - Wall Control



CFFCESD3BLSRABS
Black - No Light - SMART / Remote



CFFCESD3LBLSRABS
Black - CCT LED - SMART / Remote



56" (1420mm) Models

CFFCESD4WHWABS
White - No Light - Wall Control



CFFCESD4WHSRABS
White - No Light - SMART / Remote



CFFCESD4LWHSRABS
White - CCT LED - SMART / Remote



CFFCESD4BLWABS
Black - No Light - Wall Control



CFFCESD4BLSRABS
Black - No Light - SMART / Remote



CFFCESD4LBLSRABS
Black - CCT LED - SMART / Remote



Smart models powered
by the Tuya App
Control your fan using
your mobile device



Featuring an all new
innovative hardwired DC
wall control

Technical Data

Key Details

Install Location:	Indoor / Outdoor* & Coastal	Reversible Remote / Smart:	Yes
Motor Type:	DC	Reversible Wall Control:	No
Blade Material:	ABS Plastic	Ceiling Mount Angle:	0-15°
Operation:	Wall Control SMART/Remote	Blade Pitch:	13° (Approx)
		Timer:	1-9 Hour

About the LED Light

Light Temperature:

CCT (3000, 4200, 5000k)




2000k

6000k

Light Type:	LED (18w)
Lumens 3000k:	1300
Lumens 4200k:	1600
Lumens 5000k:	1500
Dimmable:	Yes (8 Steps)

User Replaceable LED Light Panel



Plug in LED panel can be replaced without an electrician.

LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

52" SMART / Remote

Speed	Wattage	RPM	Airflow
1	5w	60	3,911 m3/hr
2	7w	88	5,242 m3/hr
3	10w	116	6,394 m3/hr
4	16w	151	7,454 m3/hr
5	25w	185	9,202 m3/hr
6	35w	215	11,060 m3/hr

56" SMART / Remote

Speed	Wattage	RPM	Airflow
1	5w	60	5,631 m3/hr
2	7w	88	6,953 m3/hr
3	10w	116	8,824 m3/hr
4	15w	145	10,630 m3/hr
5	24w	174	13,874 m3/hr
6	35w	200	15,639 m3/hr


52" Wall Control

Speed	Wattage	RPM	Airflow
1	7w	90	5,256 m3/hr
2	9.5w	115	6,156 m3/hr
3	13.5w	140	7,038 m3/hr
4	20.6w	165	8,473 m3/hr
5	26.2w	190	9,474 m3/hr
6	35w	215	11,060 m3/hr

56" Wall Control

Speed	Wattage	RPM	Airflow
1	7.2w	90	7,069 m3/hr
2	9.8w	112	8,648 m3/hr
3	13.7w	136	9,563 m3/hr
4	18.5w	156	11,956 m3/hr
5	25.8w	178	14,021 m3/hr
6	35w	200	15,639 m3/hr

Dimensions

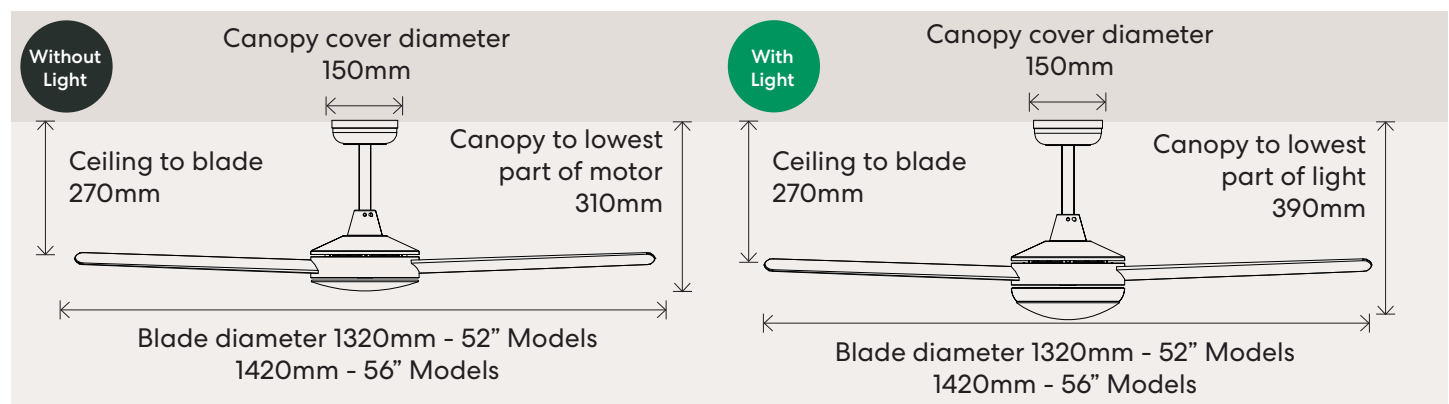

Accessories

W-CRFCMK90WH
90cm Extension Rod - White

W-CRFCMK150WH
150cm Extension Rod - White

SP-CFFCESD-LEDMOD
Replacement LED
Light Panel

W-CRFCMK90BL
90cm Extension Rod - Black

W-CRFCMK150BL
150cm Extension Rod - Black

*Must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.
Remote frequency 2.4 GHz.

