Eco Style DC 52

A contemporary three blade design to complement modern decor inside and outside the home.



Technical Data

Key Details

Install Location: Indoor / Outdoor*

Motor Type: DC

Blade Material: ABS Plastic

Operation: Remote Control

Reversible: Yes (via remote)

Timer: 1H / 4H / 8H

Ceiling Mount Angle: 0-15°

15° (Approx)

About the CCT LED Light

•

3000k 1408 Lumens 4000k 1501 Lumens 5700k 1474 Lumens Light Type: LED (18w)

Blade Pitch:

Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.




Performance - No Light Models


Speed	Motor Wattage	RPM	Airflow
1	4.2w	74	5,050 m3/hr
2	6.6w	106	6,589 m3/hr
3	9.7w	129	7,846 m3/hr
4	14.8w	153	8,326 m3/hr
5	20.3w	171	9,035 m3/hr
6	35w	208	10,486 m3/hr

Performance - LED Light Models

Speed	Motor Wattage	RPM	Airflow
1	6.8w	90	6,150 m3/hr
2	10.4w	123	7,680 m3/hr
3	15w	142	8,063 m3/hr
4	21w	161	8,540 m3/hr
5	27w	175	9,580 m3/hr
6	36w	195	10,395 m3/hr

Dimensions

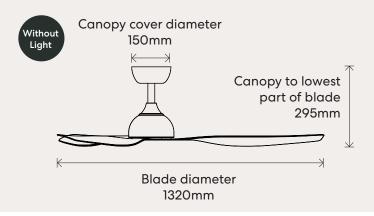

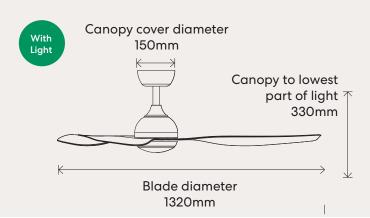

Extension Rods - No Light Models

K505M/109A K505M/118A White 900mm White 1800mm

K505M/209A K505M/218A Black 900mm Black 1800mm

Remote frequency 433 MHz.

Extension Rods - LED Light Models

K5061/109A K5061/118A White 900mm White 1800mm

K5061/209A K5061/218A Black 900mm Black 1800mm

Eco Style DC 60 DC 60

A contemporary large diameter three blade design well suited to larger living spaces.



Technical Data

Key Details

Install Location: Indoor / Outdoor*

Motor Type: DC

Blade Material: ABS Plastic

Operation: Remote Control

Reversible: Yes (via remote)

Timer: 1H / 4H / 8H

Ceiling Mount Angle: 0-15°

15° (Approx)

About the CCT LED Light

 Light Type: LED (24w)

Blade Pitch:

Dimmable: Yes (8 Steps)

SP13-FM004 - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.





Performance

Speed	Motor Wattage	RPM	Airflow
1	5.6w	80	6,880 m3/hr
2	8.3w	96	8,050 m3/hr
3	11w	113	9,290 m3/hr
4	17w	136	10,500 m3/hr
5	27w	164	13,500 m3/hr
6	40w	191	15,200 m3/hr



Dimensions

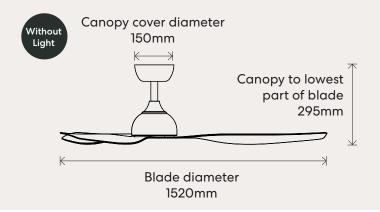

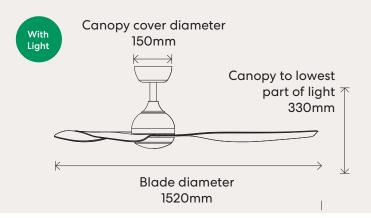

Extension Rods - No Light Models

K505M/109A K505M/118A White 900mm White 1800mm

K505M/209A K505M/218A Black 900mm Black 1800mm

Remote frequency 433 MHz.

Extension Rods - LED Light Models

K5061/109A K5061/118A White 900mm White 1800mm

K5061/209A K5061/218A Black 900mm Black 1800mm