


Horizon

DC

Updated model for 2020/21.
The high airflow ABS ceiling fan available in two size options with or without light.






fanco






52" Models No Light

64" Models No Light

White		CFFCHZ23WHSMR SMART / Remote	CFFCHZ23WHW Wall Control	CFFCHZ25WHSMR SMART / Remote	CFFCHZ25WHW Wall Control
Black		CFFCHZ23BLSMR SMART / Remote	CFFCHZ23BLW Wall Control	CFFCHZ25BLSMR SMART / Remote	CFFCHZ25BLW Wall Control
Bronze		CFFCHZ23BRSMR SMART / Remote	CFFCHZ23BRW Wall Control	CFFCHZ25BRSMR SMART / Remote	CFFCHZ25BRW Wall Control

52" Models with LED Light

64" Models with LED Light


White		CFFCHZ23WHSMR-LED SMART / Remote		CFFCHZ25WHSMR-LED SMART / Remote	
Black		CFFCHZ23BLSMR-LED SMART / Remote		CFFCHZ25BLSMR-LED SMART / Remote	
Bronze		CFFCHZ23BRSMR-LED SMART / Remote		CFFCHZ25BRSMR-LED SMART / Remote	

Technical Data

Install Location:	Indoor / Outdoor* & Coastal	Reversible Remote / Smart:	Yes
Motor Type:	DC	Reversible Wall Control:	No
Blade Material:	ABS Plastic	Ceiling Mount Angle:	0-15°
Operation:	Wall Control SMART/Remote	Blade Pitch:	17° (Approx)
		Timer:	1-9 Hour

About the LED Light

Light Temp: CCT (3000, 4200, 5000k)



2000k

6000k

Light Type: LED (18w)


Lumens 3000k: 1300

Lumens 4200k: 1600

Lumens 5000k: 1500

Dimmable: Yes (8 Steps)

User Replaceable LED Light Panel



Plug in LED panel can be replaced without an electrician.

LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

52" Models SMART/Remote Models

Speed	Motor Wattage	RPM	Airflow
1	5.3w	60	3,240 m3/hr
2	6.5w	88	5,760 m3/hr
3	8.8w	116	7,561 m3/hr
4	13.1w	145	9,829 m3/hr
5	18.5w	174	12,277 m3/hr
6	25.3w	200	13,862 m3/hr

64" Models SMART/Remote Models

Speed	Motor Wattage	RPM	Airflow
1	4.9w	60	6,913 m3/hr
2	7.1w	88	8,821 m3/hr
3	11.6w	116	10,881 m3/hr
4	18.6w	145	13,988 m3/hr
5	30w	174	17,376 m3/hr
6	45w	190	19,010 m3/hr


52" Models Wall Control

Speed	Motor Wattage	RPM	Airflow
1	6.8w	90	5,841 m3/hr
2	8.5w	112	7,410 m3/hr
3	11.9w	134	8,651 m3/hr
4	14.2w	156	10,386 m3/hr
5	19.5w	178	12,719 m3/hr
6	25.3w	200	13,862 m3/hr

64" Models Wall Control

Speed	Motor Wattage	RPM	Airflow
1	7.2w	90	8,865 m3/hr
2	10.8w	110	10,136 m3/hr
3	16.7w	130	12,451 m3/hr
4	19.1w	150	14,537 m3/hr
5	29.5w	170	17,249 m3/hr
6	45w	190	19,010 m3/hr

Dimensions

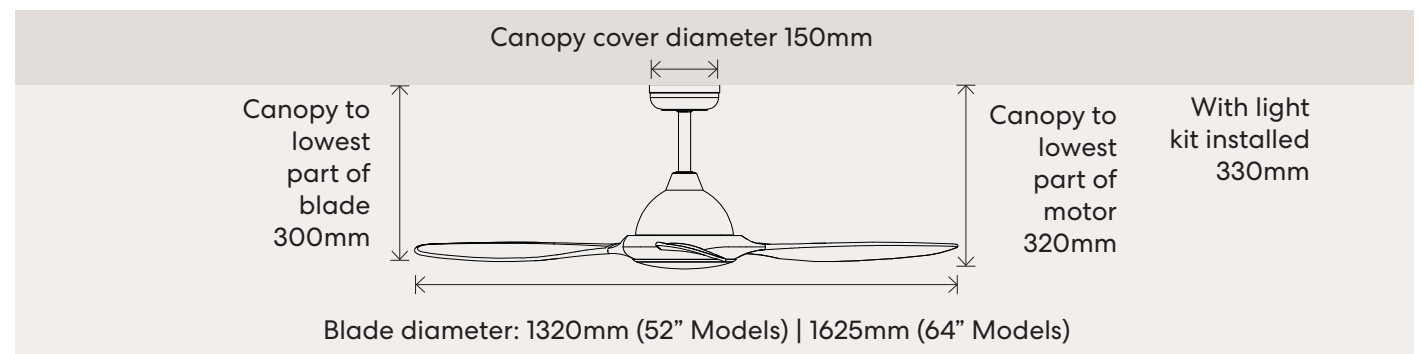

Accessories

White Rods
W-CRFCMK90WH
90cm Extension Rod

Black Rods
W-CRFCMK90BL
90cm Extension Rod

Bronze Rods
W-CRFCMK90BR
90cm Extension Rod

SP-CFFCHZ2-LEDMOD
Replacement LED
Light Panel

W-CRFCMK150WH
150cm Extension Rod

W-CRFCMK150BL
150cm Extension Rod

W-CRFCMK150BR
150cm Extension Rod

*Must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

